



DESCRIPTION

Available in SOT-323 package.


FEATURES

- ESD Protected: 1000V
- Available in SOT-323 package

ORDERING INFORMATION


Package Type	Part Number	
SOT-323 (SC70-3)	C3	AM2N702WC3R
		AM2N702WC3VR
Note	V: Halogen free Package R: Tape & Reel SPQ: 3,000pcs/Reel	
AiT provides all RoHS products Suffix “ V ” means Halogen free Package		

N CHANNEL MOSFET

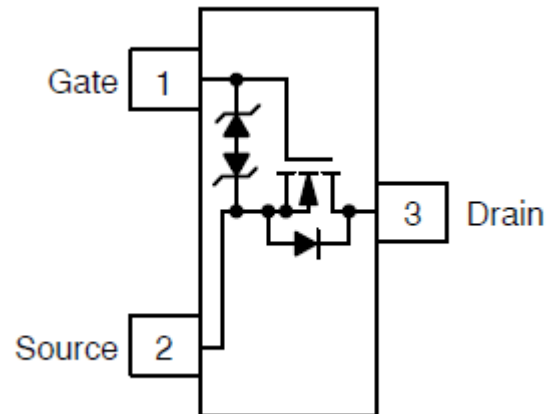



PIN DESCRIPTION

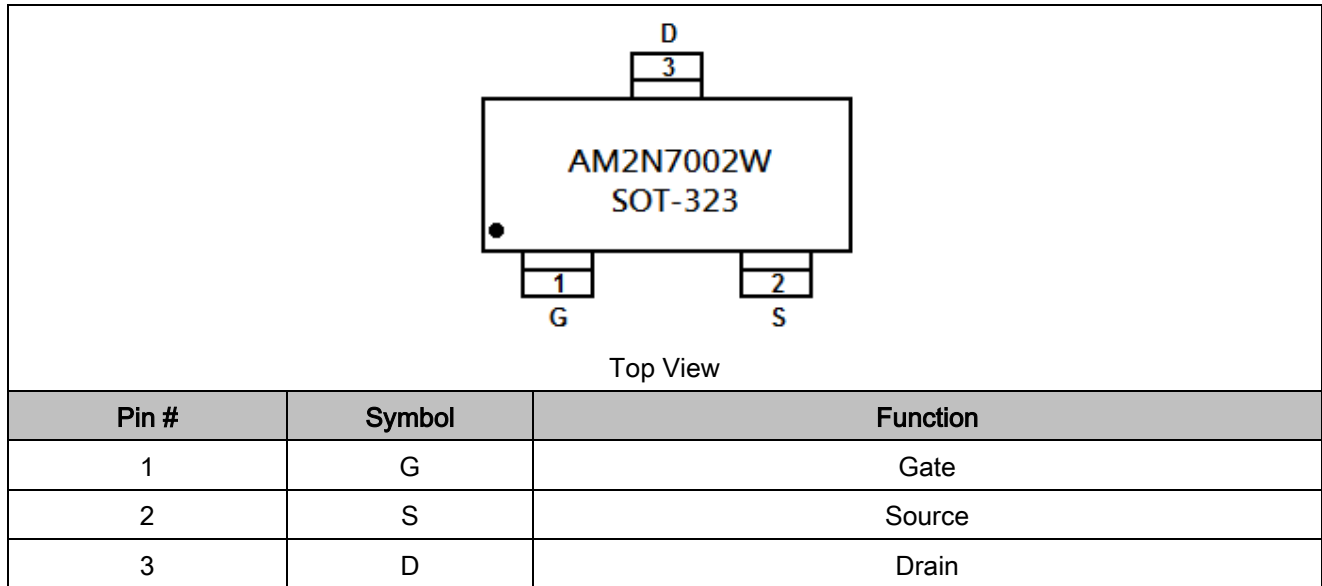



ABSOLUTE MAXIMUM RATINGS

V_{DSS} , Drain-Source Voltage	60Vdc
V_{DGR} , Drain-Gate Voltage ($R_{GS} = 1.0M\Omega$)	60Vdc
Drain Current	
I_D , Continuous $T_C = 25^\circ C$ NOTE1	$\pm 115mA_{dc}$
$T_C = 100^\circ C$ NOTE1	$\pm 75mA_{dc}$
I_{DM} , Pulsed NOTE2	$\pm 800mA_{dc}$
Gate-Source Voltage	
V_{GS} , Continuous	$\pm 20V_{dc}$
V_{GSM} , Non-repetitive ($t_p \leq 50\mu s$)	$\pm 40V_{pk}$

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

NOTE1: The Power Dissipation of the package may result in a lower continuous drain current.

NOTE2: Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2.0\%$.

THERMAL CHARACTERISTICS

Parameter	Symbol	Max.	Unit
Total Device Dissipation FR-5 Board NOTE3 $T_A = 25^\circ C$ Derate above $25^\circ C$	P_D	225 1.8	mW mW/ $^\circ C$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	556	$^\circ C/W$
Total Device Dissipation Alumina Substrate, NOTE4 $T_A = 25^\circ C$ Derate above $25^\circ C$	P_D	300 2.4	mW mW/ $^\circ C$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	417	$^\circ C/W$
Junction and Storage Temperature	T_J, T_{STG}	-55 to +150	$^\circ C$

NOTE3: FR-5 = 1.0 x 0.75 x 0.062 in.

NOTE4: Alumina = 0.4 x 0.3 x 0.025 in 99.5% alumina.



ELECTRICAL CHARACTERISTICS

T_A = 25°C, unless otherwise specified


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0, I _D = 10μAdc	60	-	-	Vdc	
Zero Gate Voltage Drain Current	I _{DSS}	V _{GS} = 0, V _{DS} = 60Vdc	T _J = 25°C	-	-	1.0	μAdc
		T _J = 125°C	-	-	500		
Gate–Body Leakage Current, Forward	I _{GSSF}	V _{GS} = 20Vdc	-	-	1	μAdc	
Gate–Body Leakage Current, Reverse	I _{GSSR}	V _{GS} = -20Vdc	-	-	-1	μAdc	
ON CHARACTERISTICS NOTE2							
Gate Threshold Voltage	V _{GS(TH)}	V _{DS} = V _{GS} , I _D = 250μAdc	1.0	1.6	2.5	Vdc	
On-State Drain Current	I _{D(ON)}	V _{DS} ≥ 2.0V _{DS(ON)} , V _{GS} =10Vdc	500	-	-	mA	
Static Drain–Source On-State Voltage	V _{DS(ON)}	V _{GS} = 10Vdc, I _D = 500mAdc	-	-	3.75	Vdc	
		V _{GS} = 5.0Vdc, I _D = 50mAdc	-	-	0.375		
Static Drain–Source On-State Resistance	r _{DS(ON)}	V _{GS} = 10V, I _D = 500mAdc	T _C = 25°C	-	1.4	7.5	Ω
		T _C = 125°C	-	-	13.5		
		V _{GS} = 5.0Vdc, I _D = 50mAdc	T _C = 25°C	-	1.8	7.5	
		T _C = 125°C	-	-	13.5		
Forward Transconductance	g _{FS}	V _{DS} ≥2.0V _{DS(ON)} ,I _D =200mAdc	80	-	-	mS	
DYNAMIC CHARACTERISTICS							
Input Capacitance	C _{ISS}	V _{DS} = 25Vcd,	-	1.7	50	pF	
Output Capacitance	C _{OSS}	V _{GS} = 0,	-	10	25		
Reverse Transfer Capacitance	C _{RSS}	f = 1.0MHz	-	2.5	5.0		
SWITCHING CHARACTERISTICS NOTE7							
Turn-On Delay Time	t _{d(ON)}	V _{DD} = 25Vdc , I _D ≅500mAdc, R _G = 25Ω, R _L = 50Ω,	-	7	20	ns	
Turn-Off Delay Time	t _{d(OFF)}	V _{GEN} = 10V	-	11	40		
BODY-DRAIN DIODE RATINGS							
Diode Forward On-Voltage	V _{SD}	I _S = 115mAdc, V _{GS} = 0V	-	-	-1.5	Vdc	
Source Current Continuous	I _S	Body Diode	-	-	-115	mAdc	
Source Current Pulsed	I _{SM}		-	-	-800	mAdc	

NOTE2: Pulse Test: Pulse Width ≤ 300μs, Duty Cycle ≤ 2.0%.




TYPICAL PERFORMANCE CHARACTERISTICS


1. Ohmic Region

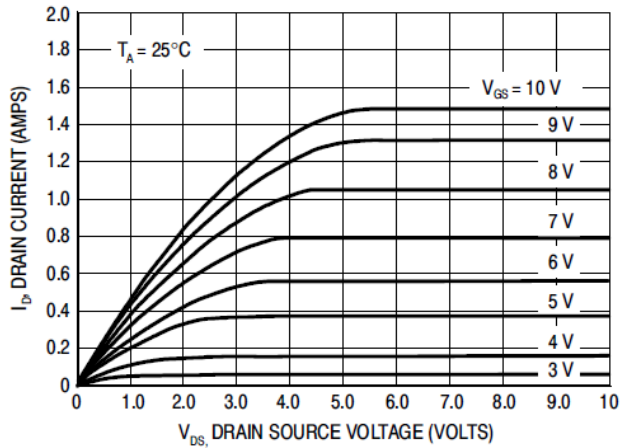


2. Transfer Characteristics

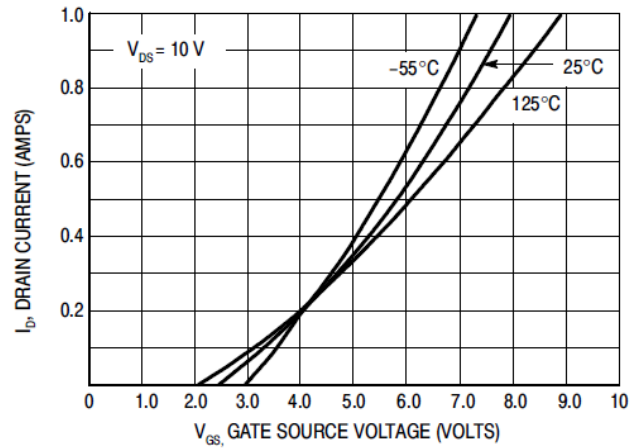

3. Temperature vs. Static Drain-Source On-Resistance

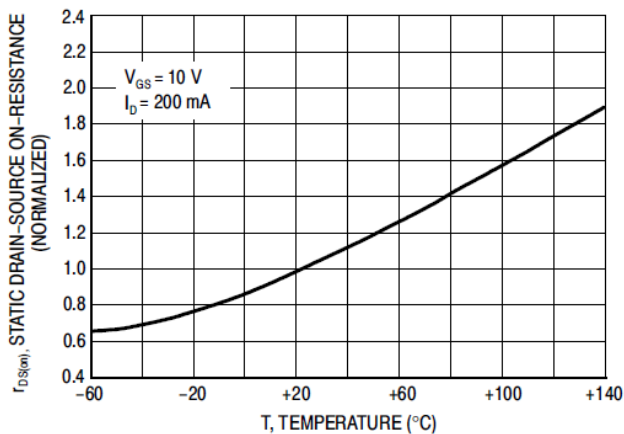


4. Temperature vs. Gate Threshold Voltage

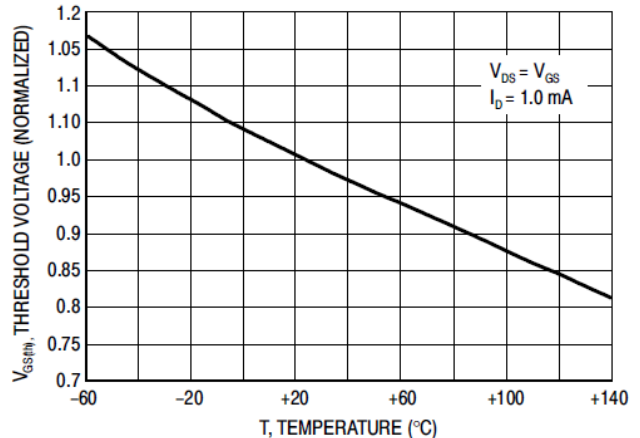



PACKAGE INFORMATION

Dimension in SOT-323(SC-70) Package (Unit: mm)

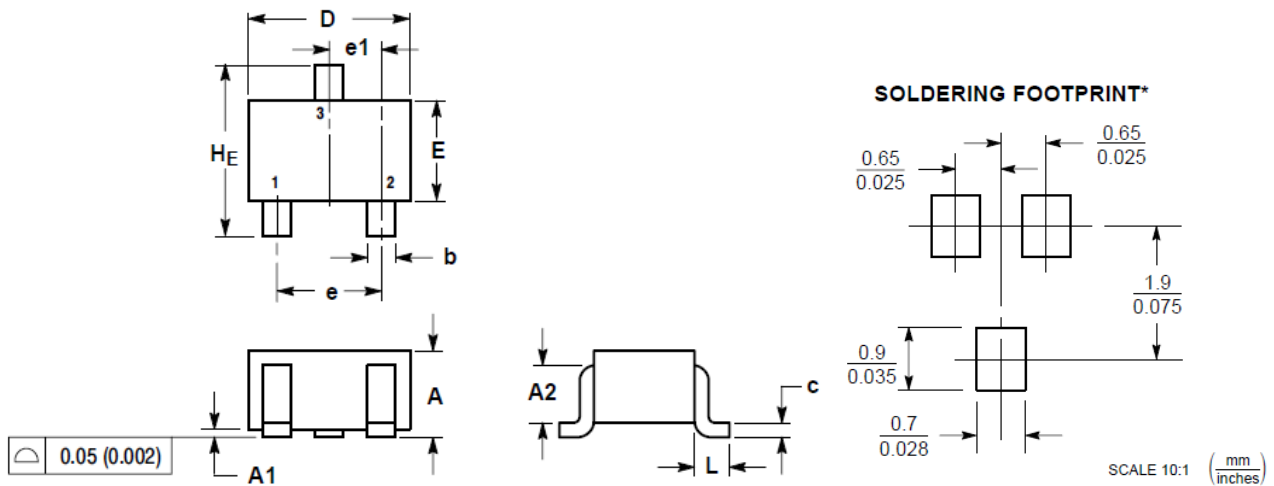

SYMBOL	MIN	MAX
A	0.800	1.000
A1	0.000	0.100
A2	0.700 REF	
b	0.300	0.400
c	0.100	0.250
D	1.800	2.200
E	1.150	1.350
e	1.200	1.400
e1	0.650 BSC	
L	0.425 REF	
HE	2.000	2.400



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.