



CHENMKO ENTERPRISE CO.,LTD

Halogens free devices

SURFACE MOUNT

Dual Digital Silicon Transistor

VOLTAGE 50 Volts CURRENT 100 mAmpere

CHUMH14GP

APPLICATION

* Switching circuit, Inverter, Interface circuit, Driver circuit.



FEATURE

- * Small surface mounting type. (SC-88/SOT-363)
- * High current gain.
- * Suitable for high packing density.
- * Low collector-emitter saturation.
- * High saturation current capability.
- * Both the CHDTC144T in one package.
- * Built in bias resistor(R1=47kΩ, Typ.)



SC-88/SOT-363

CIRCUIT



Dimensions in millimeters

SC-88/SOT-363

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-Base voltage		50	V
V _{CEO}	Collector-Emitter voltage		50	V
V _{EB0}	Emitter-Base voltage		5	V
I _{C(Max.)}	Collector current		100	mA
P _D	Power dissipation	T _{amb} ≤ 25 °C, Note 1	150	mW
T _{STG}	Storage temperature		-55 ~ +150	°C
T _J	Junction temperature		-55 ~ +150	°C
R _{θJ-S}	Thermal resistance , Note 1	junction - soldering point	140	°C/W

Note

1. Transistor mounted on an FR4 printed-circuit board.

RATING CHARACTERISTIC (CHUMH14GP)

CHARACTERISTICS

T_{amb} = 25 °C unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
BV _{CBO}	Collector-base breakdown voltage	I _C =50uA	50	—	—	V
BV _{CEO}	Collector-emitter breakdown voltage	I _C =1.0mA	50	—	—	V
BV _{EBO}	Emitter-base breakdown voltage	I _E =50uA	5.0	—	—	V
I _{CBO}	Collector cutoff current	V _{CB} =50V	—	—	0.5	uA
I _{EBO}	Emitter cutoff current	V _{EB} =4V	—	—	0.5	uA
V _{CE(sat)}	Collector-emitter saturation voltage	I _C /I _B =5mA/0.5mA	—	—	0.3	V
h _{FE}	DC current gain	I _C =1mA; V _{CE} =5.0V	100	250	600	
R ₁	Input resistor		32.9	47	61.1	KΩ
f _T	Transition frequency	I _C =5mA, V _{CE} =10.0V f=100MHz	—	250	—	MHz

Note

1.Pulse test: t_p≤300uS; δ≤0.02.

RATING CHARACTERISTIC CURVES (CHUMH14GP)

Typical Electrical Characteristics

Fig.1 DC current gain vs. collector current

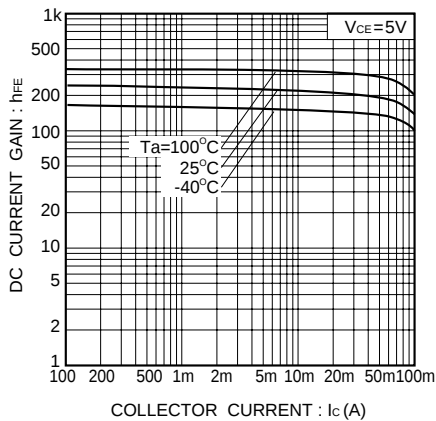


Fig.2 Collector-emitter voltage vs. collector current

