
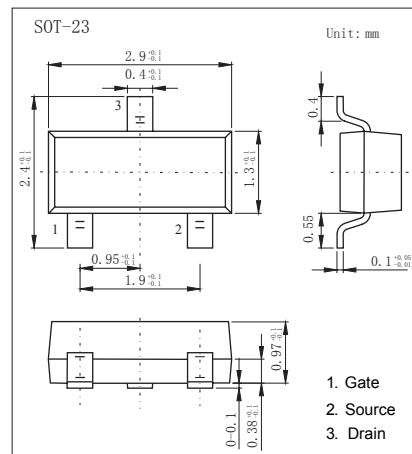


P-Channel MOSFET

2SJ211

■ Features

- $V_{DS}(V) \approx -100V$
- $I_D \approx -0.2 A$
- $R_{DS(ON)} < 20 \Omega$ ($V_{GS} = -10V$)
- $R_{DS(ON)} < 30 \Omega$ ($V_{GS} = -4V$)



■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	-100	V
Gate-Source Voltage	V_{GS}	± 20	
Continuous Drain Current	I_D	-0.2	A
Pulsed Drain Current (Note.1)	I_{DM}	-0.4	
Power Dissipation	P_D	0.2	W
Junction Temperature	T_J	150	$^\circ C$
Junction Storage Temperature Range	T_{stg}	-55 to 150	

Note.1: $PW \leq 10$ ms, duty cycle $\leq 50\%$

■ Electrical Characteristics $T_a = 25^\circ C$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	V_{BSS}	$I_D = -250 \mu A$, $V_{GS} = 0V$	-100			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -100V$, $V_{GS} = 0V$			-1	μA
Gate-Body leakage current	I_{GSS}	$V_{DS} = 0V$, $V_{GS} = \pm 20V$			± 10	μA
Gate to Source Cutoff Voltage	$V_{GS(off)}$	$V_{GS} = -5V$, $I_D = -1mA$	-1.4		-2.4	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS} = -10V$, $I_D = -10mA$			20	Ω
		$V_{GS} = -4V$, $I_D = -10mA$			30	
Forward Transconductance	g_{FS}	$V_{DS} = -5V$, $I_D = -10mA$	20	45		mS
Input Capacitance	C_{iss}	$V_{GS} = 0V$, $V_{DS} = -5V$, $f = 1MHz$		27		pF
Output Capacitance	C_{oss}			16		
Reverse Transfer Capacitance	C_{rss}			2		
Turn-On Delay Time	$t_{d(on)}$	$V_{GS(on)} = -4V$, $I_D = -10mA$, $R_L = 500 \Omega$, $R_G = 10 \Omega$, $V_{DD} = -5V$,		110		ns
Turn-On Rise Time	t_r			150		
Turn-Off Delay Time	$t_{d(off)}$			160		
Turn-Off Fall Time	t_f			150		







■ Marking

Marking	H18
---------	-----

P-Channel MOSFET

2SJ211





Typical Characteristics

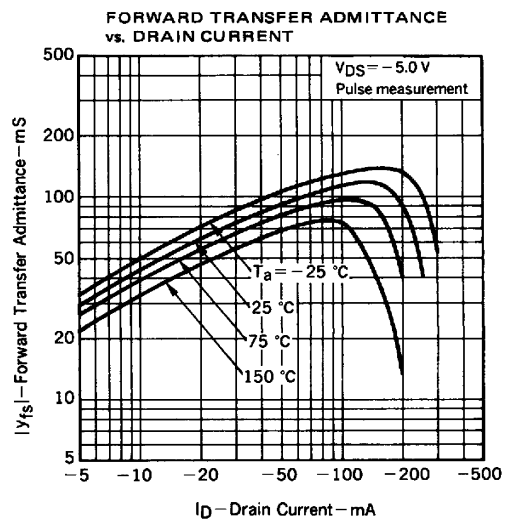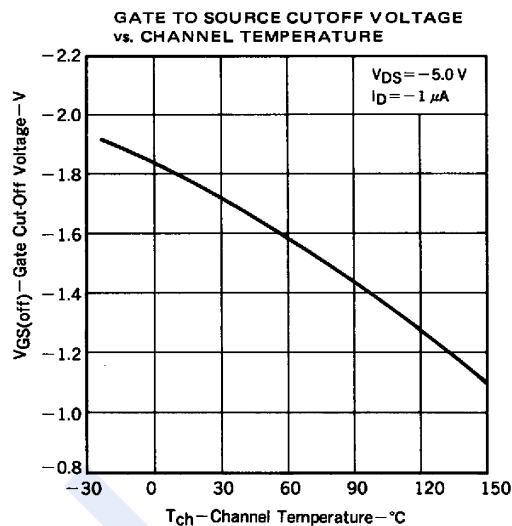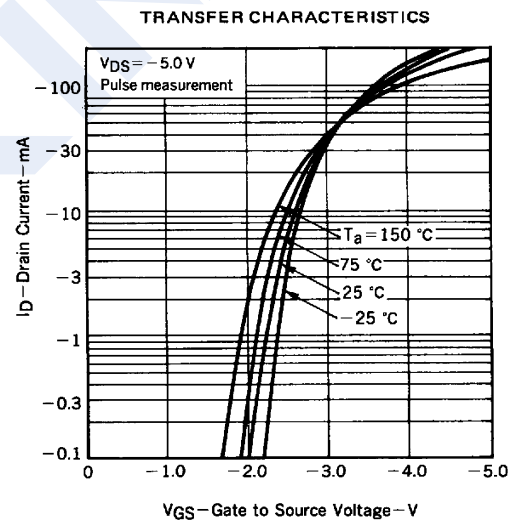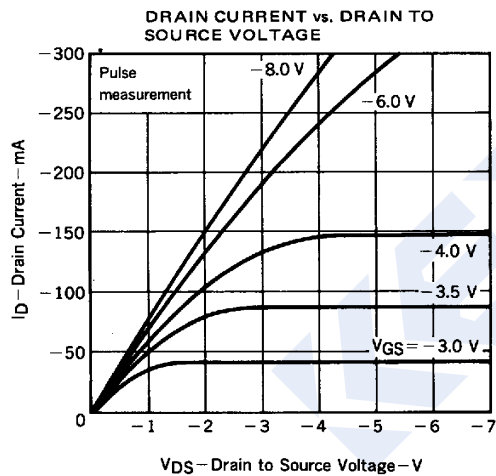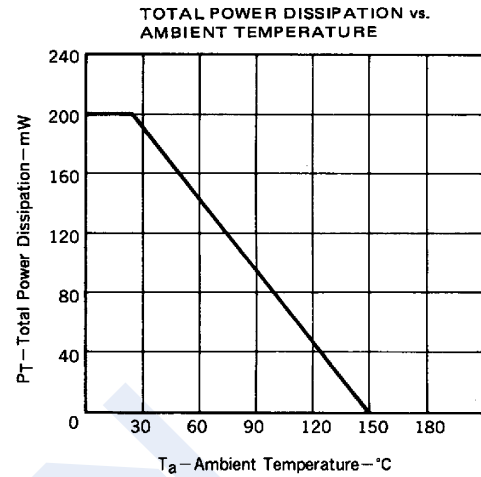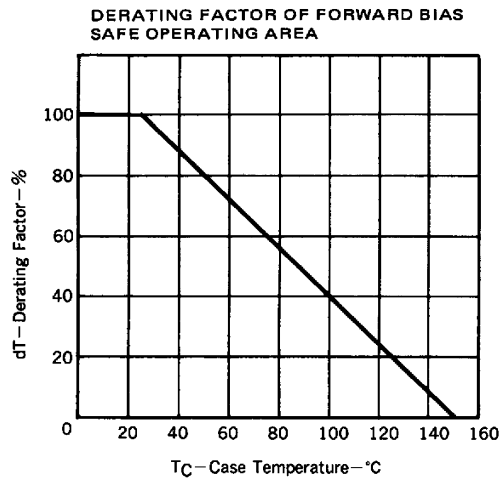


P-Channel MOSFET

2SJ211

■ Typical Characteristics

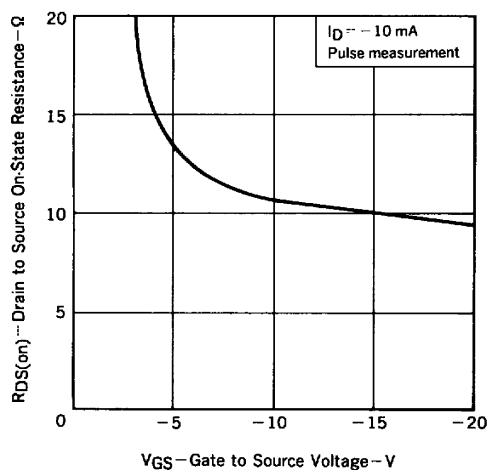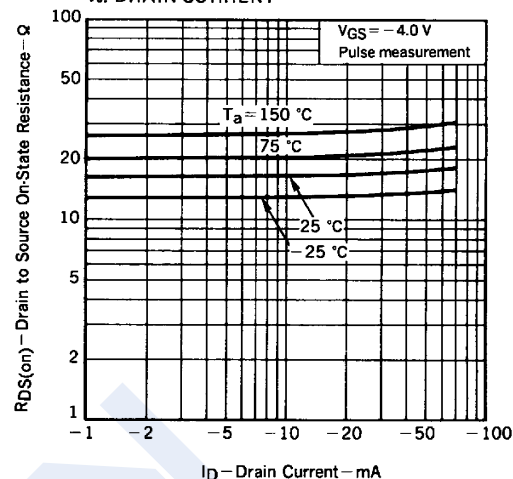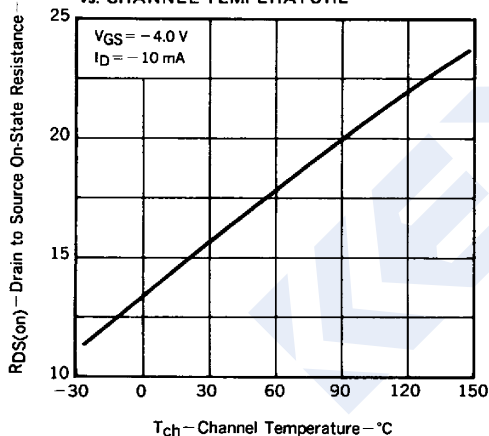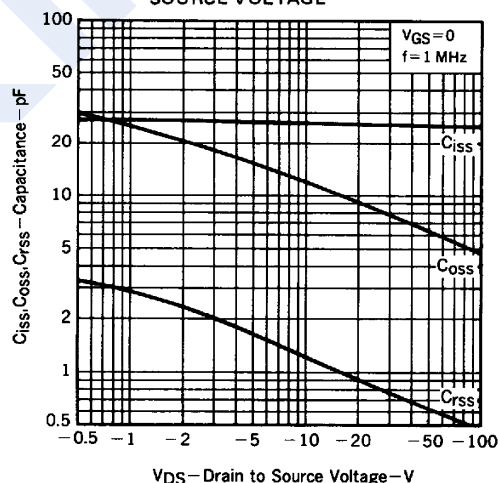DRAIN TO SOURCE ON-STATE RESISTANCE
vs. GATE TO SOURCE VOLTAGEDRAIN TO SOURCE ON-STATE RESISTANCE
vs. DRAIN CURRENTDRAIN TO SOURCE ON-STATE RESISTANCE
vs. CHANNEL TEMPERATURECAPACITANCE vs. DRAIN TO
SOURCE VOLTAGE

SWITCHING CHARACTERISTICS

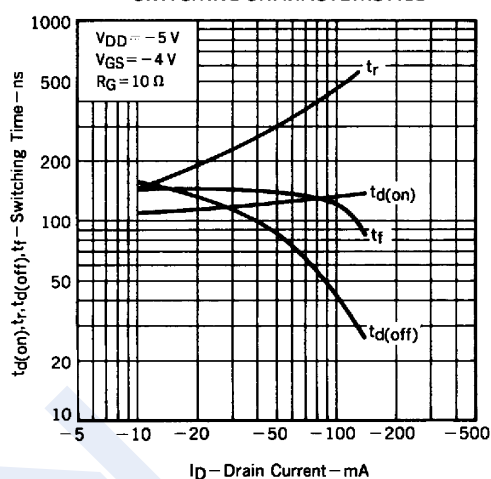SOURCE TO DRAIN DIODE
FORWARD VOLTAGE