


High Speed Switching Application

Features

- ESD rating: 2000V (HBM)
- Low On-Resistance: $R_{DS(on)} < 3\Omega$ @ $V_{GS} = 10V$
- High power and current handling capability
- Very fast switching
- RoHS compliant device

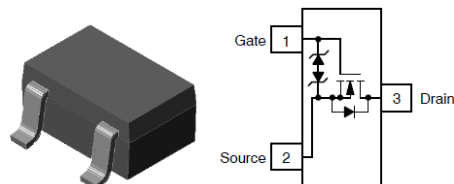

Applications


- High speed line driver

SOT-323

Ordering Information

Part Number	Marking Code	Package	Packaging
2N7002KU	7K2 □	SOT-323	Tape & Reel

Marking Information



7K2 = Specific Device Code

□ = Year & Week Code Marking

Absolute Maximum Ratings ($T_{amb}=25^{\circ}C$, Unless otherwise specified)

Characteristic	Symbol	Ratings	Unit
Drain-Source voltage	V_{DS}	60	V
Gate-Source voltage	V_{GS}	± 20	V
Maximum drain current (Note 1)	I_D	300	mA
Pulsed drain current (Note 1)	I_{DP}	800	mA
Power dissipation (Note 2)	P_D	310	mW
Operating junction temperature	T_j	150	$^{\circ}C$
Storage temperature range	T_{stg}	-55 ~ 150	$^{\circ}C$
Thermal resistance junction to ambient (Note 2)	$R_{th(j-a)}$	400	$^{\circ}C/W$

Note 1) Limited only maximum junction temperature

Note 2) Device mounted on FR-4 board with recommended pad layout.

Electrical Characteristics ($T_{amb}=25^{\circ}\text{C}$, Unless otherwise specified)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Drain-Source breakdown voltage	BV_{DSS}	$I_D=250\mu\text{A}$, $V_{GS}=0$	60	-	-	V
Gate-Source breakdown voltage	BV_{GSS}	$I_G=250\mu\text{A}$, $V_{DS}=0$	± 20	-	-	V
Gate-Threshold voltage	$V_{GS(th)}$	$I_D=250\mu\text{A}$, $V_{DS}=V_{GS}$	1	-	2.5	V
Zero Gate voltage drain current	I_{DSS}	$V_{DS}=60\text{V}$, $V_{GS}=0$	-	-	1	μA
Gate-body leakage	I_{GSS}	$V_{GS}=\pm 5\text{V}$, $V_{DS}=0\text{V}$	-	-	± 100	nA
		$V_{GS}=\pm 10\text{V}$, $V_{DS}=0\text{V}$			± 150	nA
		$V_{GS}=\pm 20\text{V}$, $V_{DS}=0\text{V}$			± 10	μA
Drain-Source on-resistance (Note 3)	$R_{DS(on)}$	$V_{GS}=10\text{V}$, $I_D=0.5\text{A}$	-	-	3	Ω
		$V_{GS}=5\text{V}$, $I_D=0.05\text{A}$	-	-	3.5	
Forward trans-conductance (Note 3)	g_{fs}	$V_{DS}=10\text{V}$, $I_D=0.2\text{A}$	0.08	-	-	S
Input capacitance	C_{iss}	$V_{DS}=25\text{V}$, $V_{GS}=0$, $f=1\text{MHz}$	-	30	50	pF
Output capacitance	C_{oss}		-	7	-	
Reverse Transfer capacitance	C_{rss}		-	4	-	
Turn-on delay time (Note 3, 4)	$t_{d(on)}$	$V_{DD}=30\text{V}$, $I_D=0.2\text{A}$, $V_{GS}=10\text{V}$, $R_G=10\Omega$	-	2	-	ns
Rise time (Note 3, 4)	t_r		-	15	-	
Turn-off delay time (Note 3, 4)	$t_{d(off)}$		--	8	-	
Fall time (Note 3, 4)	t_f		-	11	-	
Total gate charge (Note 3, 4)	Q_g	$V_{DS}=10\text{V}$, $I_D=0.25\text{A}$, $V_{GS}=4.5\text{V}$	-	0.6	0.8	nC
Gate-Source charge (Note 3, 4)	Q_{gs}		-	0.2	-	
Gate-Drain charge (Note 3, 4)	Q_{gd}		-	0.2	-	
Diode forward voltage (Note 3)	V_{SD}	$V_{GS}=0\text{V}$, $I_S=0.2\text{A}$	-	-	1.3	V

Note 3) Pulse test: Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$

Note 4) Essentially independent of operating temperature typical characteristics.

Electrical Characteristics Curves

Fig. 1 $I_D - V_{DS}$

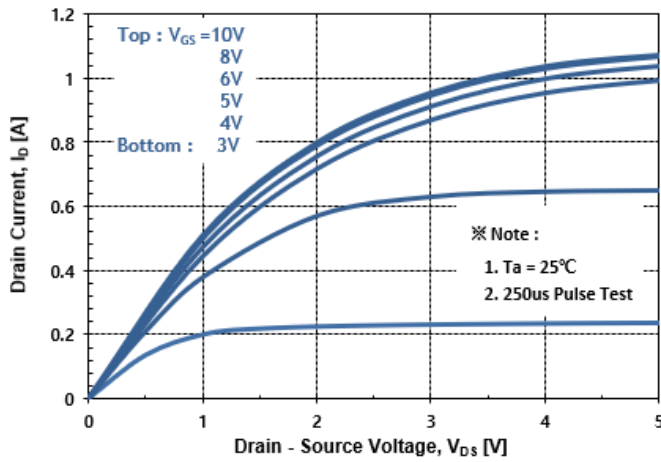


Fig. 2 $I_D - V_{GS}$

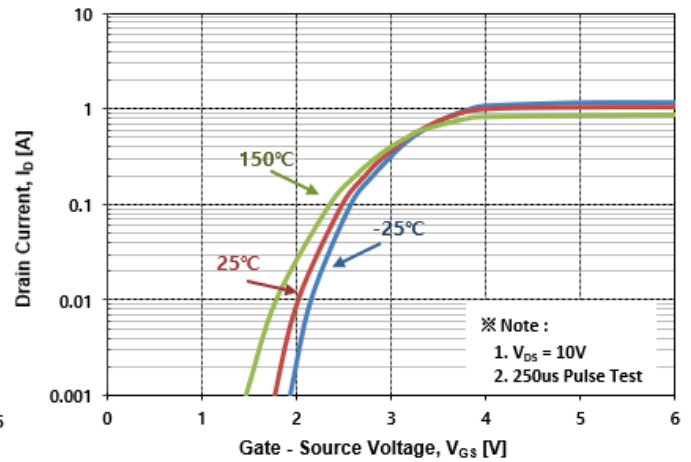


Fig. 3 $R_{DS(ON)} - I_D$

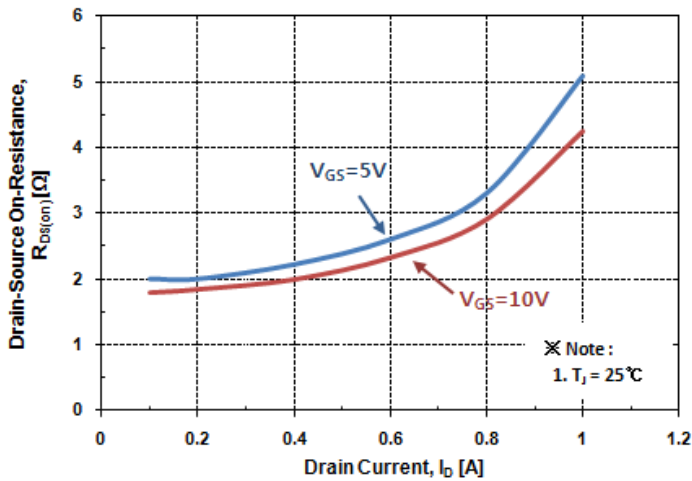


Fig. 4 $I_S - V_{SD}$

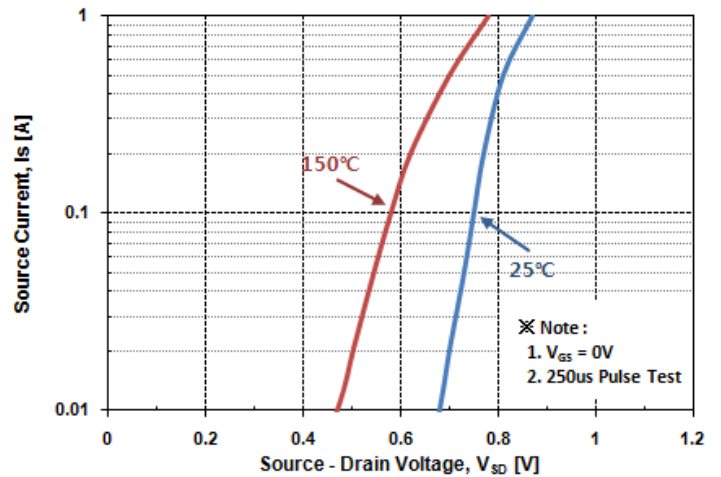


Fig. 5 Capacitance - V_{DS}


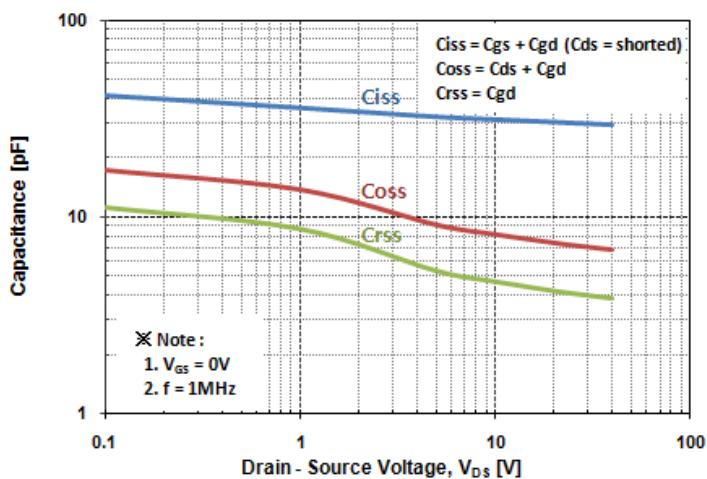


Fig. 6 $V_{GS} - Q_G$

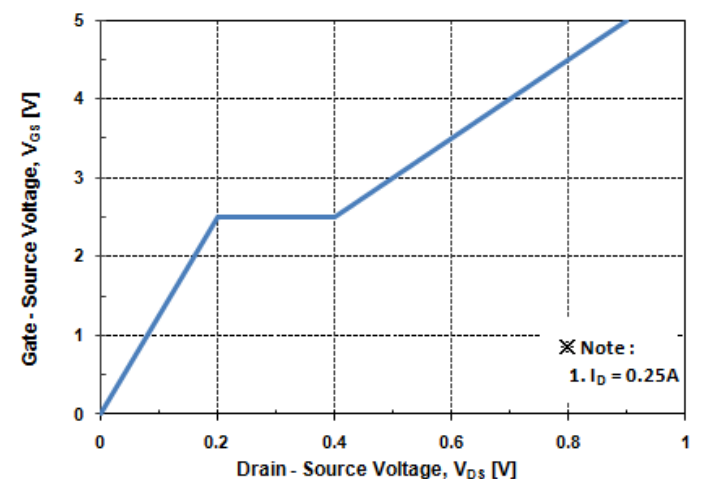

Electrical Characteristics Curves

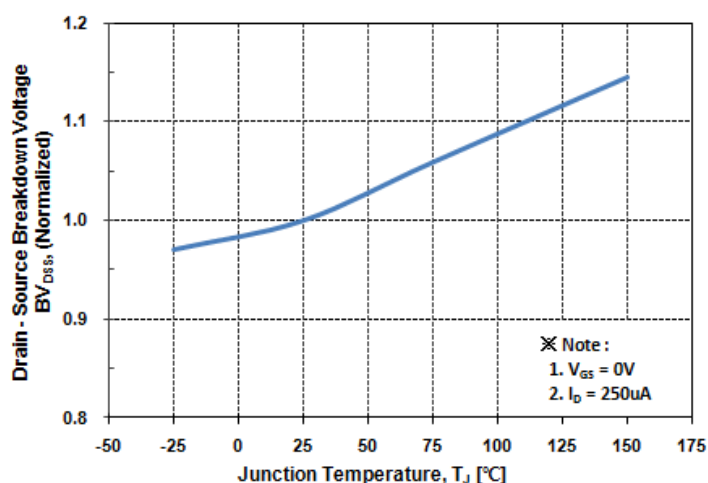
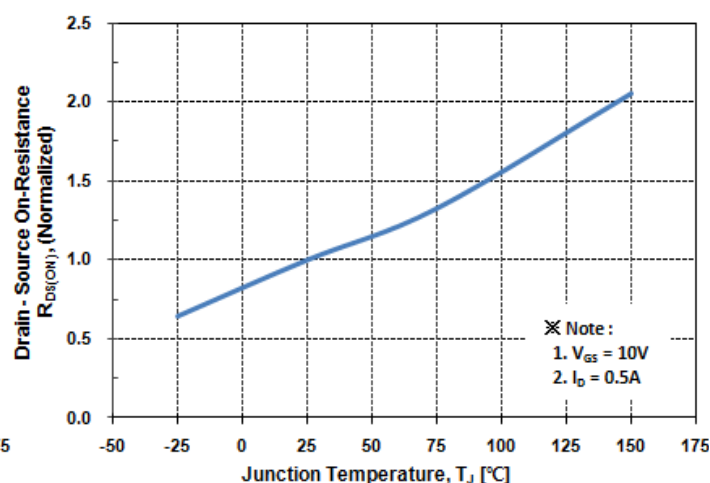
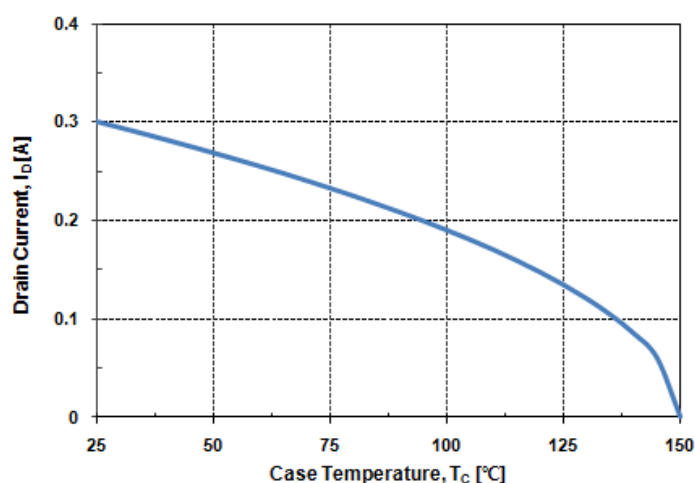
Fig. 7 $V_{DS} - T_J$

Fig. 8 $R_{DS(on)} - T_J$

Fig. 9 $I_D - T_C$


Fig. 10 Safe Operating Area



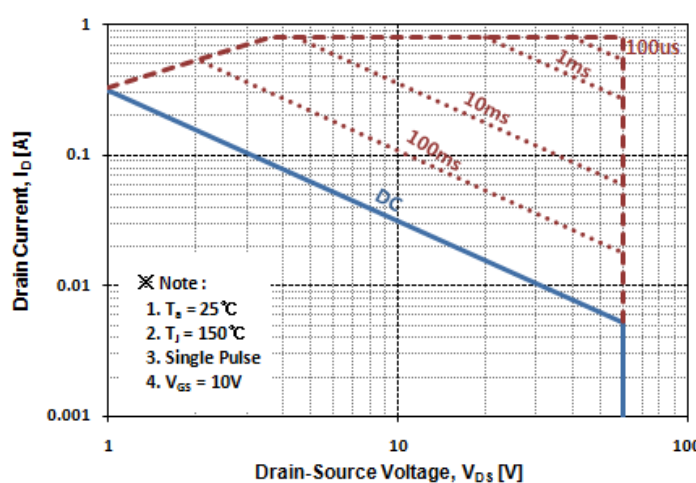


Fig. 11 Transient Thermal Impedance

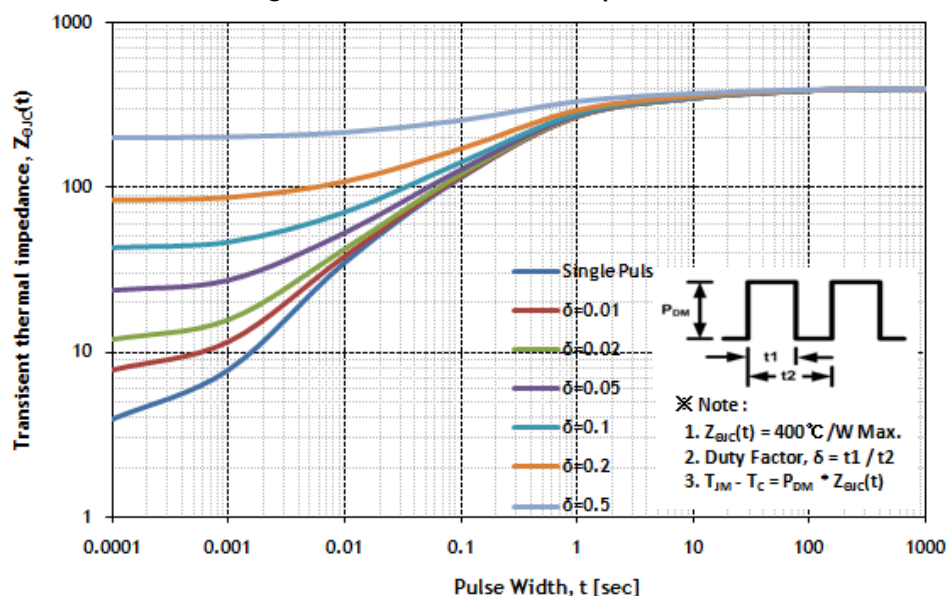


Package Outline Dimensions

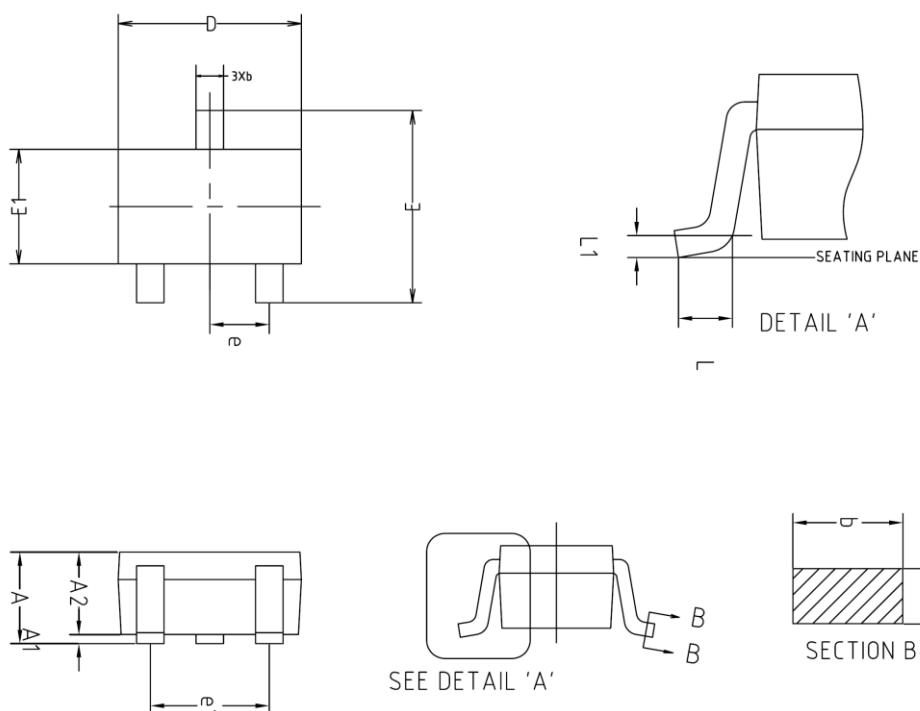

SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	0.90	-	1.25	
A1	0.00	-	0.10	
A2	0.85	0.90	0.95	
b	0.30	-	0.40	
c	0.10	-	0.25	
D	1.90	2.00	2.10	
E	1.95	2.10	2.25	
E1	1.15	1.25	1.35	
e	0.65BSC			
e1	1.20	-	1.40	
L	0.10	-	-	
L1	0.12BSC			

※ Recommend PCB solder land (Unit: mm)

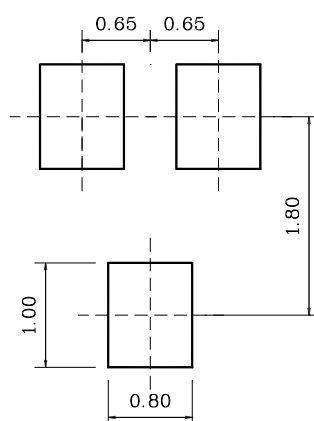

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.