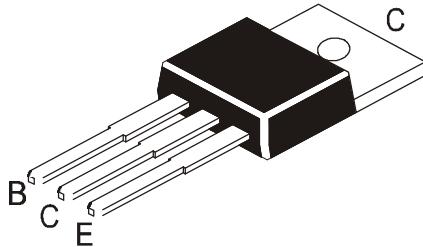
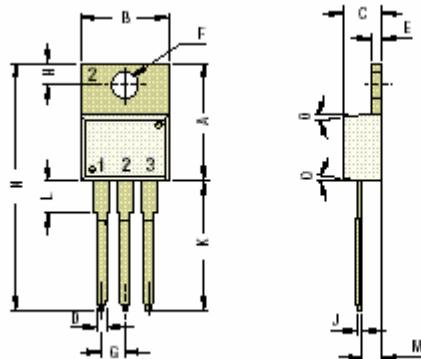


NPN PLASTIC POWER TRANSISTOR
CDL13007D

TO-220
Plastic Package
Built in Diode
ABSOLUTE MAXIMUM RATINGS

DESCRIPTION	SYMBOL	VALUE	UNIT
Collector Base Voltage	V_{CBO}	700	V
Collector Emitter Voltage	V_{CEO}	400	V
Emitter Base Voltage	V_{EBO}	9	V
Collector Current Continuous	I_C	7	A
Collector Power Dissipation $T_c=25^\circ\text{C}$	P_C	80	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$ unless specified otherwise)


DESCRIPTION	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Collector Cut Off Current	I_{CBO}	$V_{CB}=700\text{V}$, $I_E=0$			100	μA
Emitter Cut Off Current	I_{EBO}	$V_{EB}=9\text{V}$, $I_C=0$			100	μA
DC Current Gain	h_{FE}	$I_C=2\text{A}$, $V_{CE}=5\text{V}$	15		35	
Collector Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C=5\text{A}$, $I_B=1\text{A}$			1.0	V
Base Emitter Saturation Voltage	$V_{BE(\text{sat})}$	$I_C=5\text{A}$, $I_B=1\text{A}$			1.5	V
Transition Frequency	f_T	$V_{CE}=10\text{V}$, $I_C=0.5\text{A}$	5.0			MHz
Storage Time	t_s	$I_C=0.5\text{A}$	3.0		6.0	μs
Diode forward Voltage	V_{FEC}	$I_F=2\text{A}$			2.0	V

TO-220
 Leaded Plastic
 Package


DIM	Min	Max
A	14.42	16.51
B	9.63	10.67
C	3.56	4.83
D	—	0.90
E	1.15	1.50
F	3.53	4.10
G	2.29	2.79

DIM	Min	Max
H	2.54	3.43
J	0.36	0.61
K	12.00	14.73
L	2.80	6.35
M	2.00	2.92
N	—	31.24
O	—	7 ^a

 Pin Configurations
 Pin 1: Base Pin 2: Collector Pin 3: Emitter

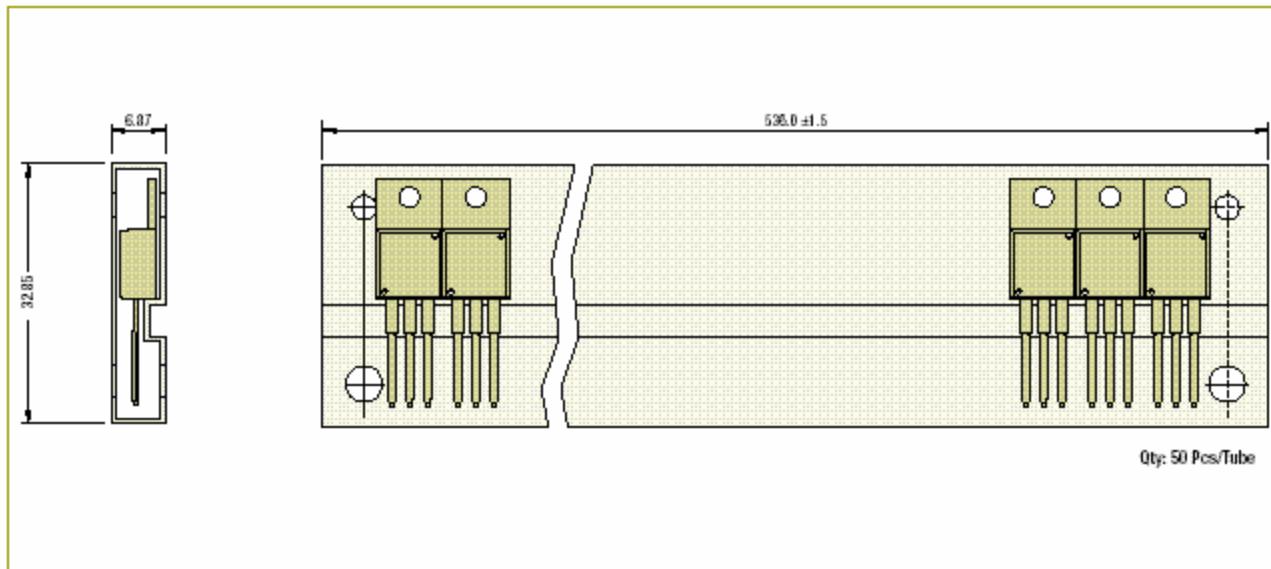TO-220 Series Packaging Tube


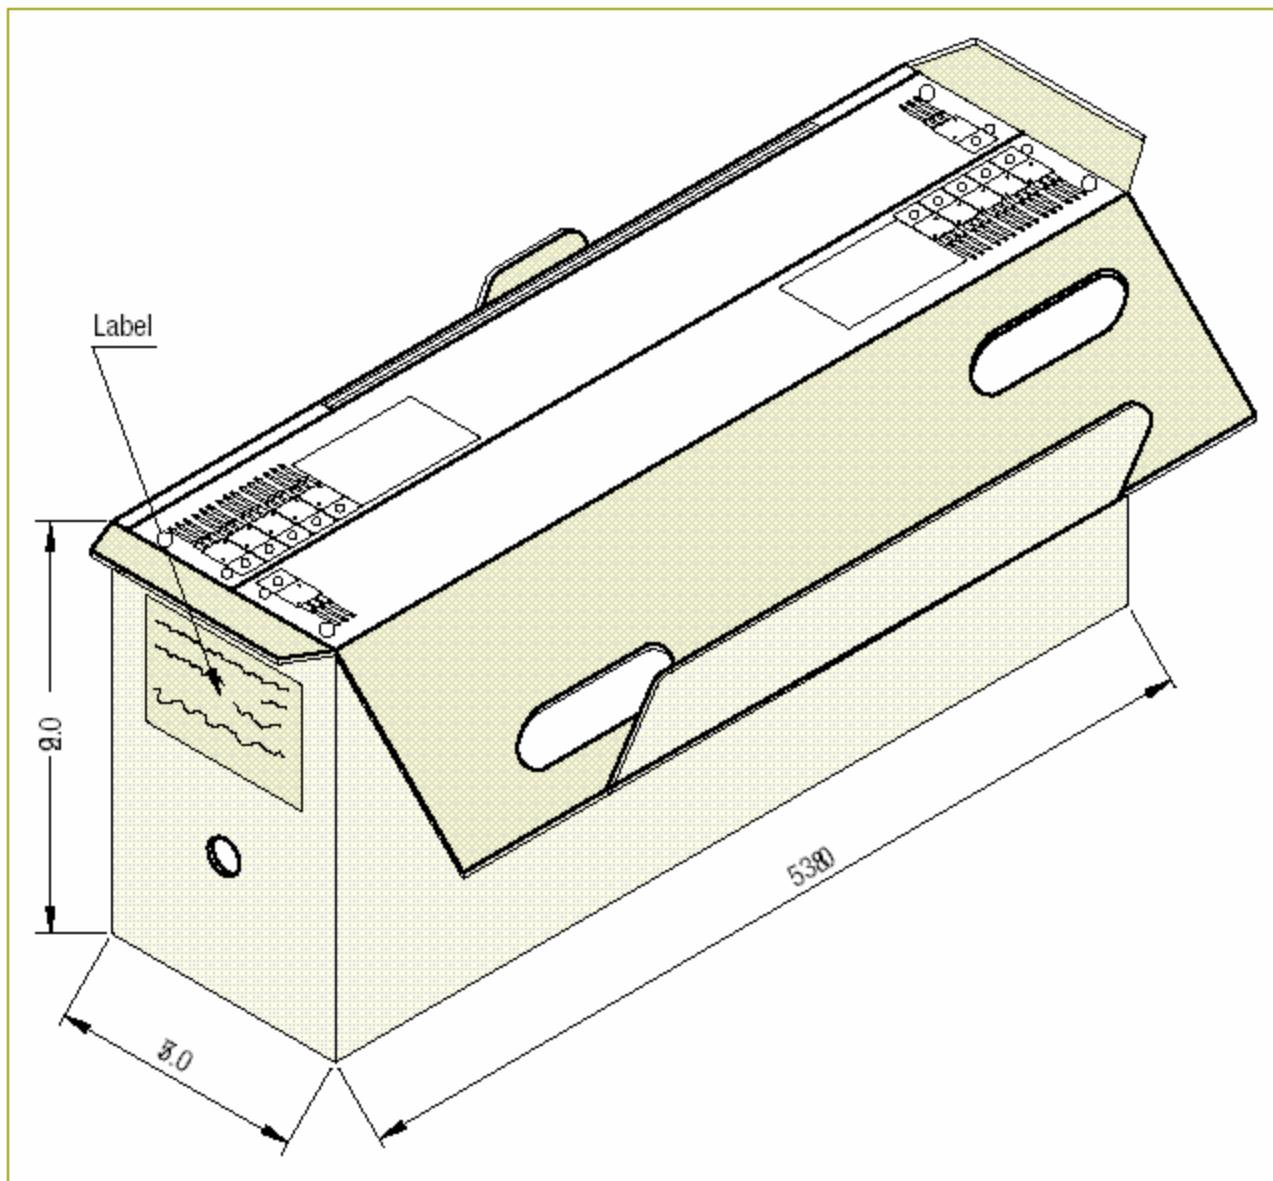
Packaging dimensions, tube dimensions and quantity/tube are approximate and subject to change.

... Packaging Specifications

T & A: Tape and Ammo Pack; T & R: Tape and Reel; Bulk: Loose in Poly Bags; Tube: Tube and Carton; K: 1,000

Package / Case Type	Packaging Type	Std. Packing	Inner Carton			Outer Carton		
			Qty	Qty	Size L x W x H (cm)	Gross Weight (Kg)	Qty	Size L x W x H (cm)
<i>... continued from previous page</i>								
TO-220	Bulk	1,000	1K	19 x 19 x 8	2.0	10K	46 x 38 x 22	21.6
	Tube	1,000 (50 pcs/tube)	1K	55 x 8 x 10	2.8	10K	55 x 35 x 27	28.3

Packaging for Tubes



Packaging dimensions/carton dimensions are approximate. Illustration shows packaging box for TO-220 Series.
For dimensions of other tube packaging, please refer to Packaging Specifications page.

Component Disposal Instructions

1. CDIL Semiconductor Devices are RoHS compliant, customers are requested to please dispose as per prevailing Environmental Legislation of their Country.
2. In Europe, please dispose as per EU Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE).

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.

Telephone + 91-11-2579 6150, 4141 1112 Fax + 91-11-2579 5290, 4141 1119
email@cdil.com www.cdilsemi.com