



IGBT Discrete

V_{CE}	650	V
I_C	50	A
$V_{CE(SAT)} I_C=50A$	1.95	V


Applications

- High frequency switching application
- Medical applications
- Uninterruptible power supply
- Motion/servo control

Features

- Low switching losses
- Maximum junction temperature 175°C
- Positive temperature coefficient
- High ruggedness, temperature stable
- High short circuit capability(5us)

Circuit



Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-Emitter Breakdown Voltage	V_{CE}	650	V
DC Collector Current, limited by T_{jmax} $T_C=25^{\circ}C$ $T_C=100^{\circ}C$	I_C	100 50	A
Diode Forward Current, limited by T_{jmax} $T_C=25^{\circ}C$ $T_C=100^{\circ}C$	I_F	60 30	A
Continuous Gate-Emitter Voltage	V_{GE}	± 20	V
Transient Gate-Emitter Voltage	V_{GE}	± 30	V
Turn off Safe Operating Area $V_{CE} \leq 1200V$, $T_j \leq 150^{\circ}C$		200	A
Pulsed Collector Current, $V_{GE}=15V$, t_p limited by T_{jmax}	I_{CM}	200	A
Diode Pulsed Current, t_p limited by T_{jmax}	I_{Fpuls}	120	A
Short Circuit Withstand Time, $V_{GE}=15V$, $V_{CC}=400V$, $V_{CEM} \leq 650V$	T_{sc}	5	μs
Power Dissipation, $T_j=175^{\circ}C$, $T_c=25^{\circ}C$	P_{tot}	357	W



Operating Junction Temperature	T_j	-40...+175	°C
Storage Temperature	T_s	-55...+150	°C
Soldering Temperature, wave soldering 1.6mm (0.063in.) from case for 10s		260	°C

Electrical Characteristics of the IGBT ($T_j = 25^\circ\text{C}$ unless otherwise specified):

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static						
Collector-Emitter Breakdown Voltage	BV_{CES}	$V_{GE}=0V, I_C=250\mu A$	650		-	V
Gate Threshold Voltage	$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C=0.8mA$	4.5	5.0	5.5	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V, I_C=50A$ $T_j=25^\circ\text{C},$ $T_j=125^\circ\text{C}$ $T_j=150^\circ\text{C}$		1.95 2.30 2.40	2.40	V
Zero Gate Voltage Collector Current	I_{CES}	$V_{CE}=650V, V_{GE}=0V$ $T_j=25^\circ\text{C},$ $T_j=150^\circ\text{C}$			0.25 4.00	mA
Gate-Emitter Leakage Current	I_{GES}	$V_{CE}=0V, V_{GE}=\pm 20V$			100	nA

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Dynamic						
Input Capacitance	C_{ies}	$V_{CE}=25V, V_{GE}=0V,$ $f=1MHz$	-	2.07	-	nF
Reverse Transfer Capacitance	C_{res}		-	0.83	-	
Gate Charge	Q_G	$V_{CC}=300V, I_C=50A,$ $V_{GE}=15V$	-	0.21	-	uC
Short Circuit Collector Current	I_{SC}	$V_{GE}=15V, t_{sc}\leq 5\mu s,$ $V_{CC}=400V, T_j\leq 150^\circ\text{C}$	-	250	-	A

**Electrical Characteristics of the Diode** ($T_j = 25^\circ\text{C}$ unless otherwise specified):

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static						
Diode Forward Voltage	V_F	$I_F = 50\text{A}$ $T_j = 25^\circ\text{C}$, $T_j = 125^\circ\text{C}$ $T_j = 150^\circ\text{C}$		2.00 1.95 1.95	2.50	V

Switching Characteristic, Inductive Load





Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Dynamic , at T _j = 25℃						
Turn-on Delay Time	t _{d(on)}	V _{CC} =300V, I _C =50A, V _{GE} = -15v~15V, R _g =20Ω,Ls=60nH	-	28	-	ns
Rise Time	t _r		-	50	-	ns
Turn-on Energy	E _{on}		-	1.49	-	mJ
Turn-off Delay Time	t _{d(off)}		-	129	-	ns
Fall Time	t _f		-	51	-	ns
Turn-off Energy	E _{off}		-	0.67	-	mJ
Dynamic , at T _j = 125℃						
Turn-on Delay Time	t _{d(on)}	V _{CC} =300V, I _C =50A,, V _{GE} = -15v~15V, R _g =33 Ω ,Ls=60nH	-	35	-	ns
Rise Time	t _r		-	60	-	ns
Turn-on Energy	E _{on}		-	2.21	-	mJ
Turn-off Delay Time	t _{d(off)}		-	220	-	ns
Fall Time	t _f		-	60	-	ns
Turn-off Energy	E _{off}		-	1.02	-	mJ
Dynamic , at T _j = 150℃						
Turn-on Delay Time	t _{d(on)}	V _{CC} =300V, I _C =50A,, V _{GE} = -15v~15V, R _g =33 Ω ,Ls=60nH	-	38	-	ns
Rise Time	t _r		-	64	-	ns
Turn-on Energy	E _{on}		-	2.54	-	mJ
Turn-off Delay Time	t _{d(off)}		-	230	-	ns
Fall Time	t _f		-	63	-	ns
Turn-off Energy	E _{off}		-	1.15	-	mJ





**Electrical Characteristics of the DIODE**



Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Dynamic , at T _j = 25°C						
Reverse Recovery Current	I _{rr}	I _F =50A, V _R =300V di/dt= -437A/μs,	-	5.0	-	A
Reverse Recovery Charge	Q _{rr}		-	0.09	-	uC
Diode reverse recovery time	trr		-	35	-	ns
Reverse Recovery Energy	E _{rec}		-	0.03		mJ
Dynamic , at T _j = 125°C						
Reverse Recovery Current	I _{rr}	I _F =50A, V _R =300V di/dt= -437A/μs,	-	7.2	-	A
Reverse Recovery Charge	Q _{rr}		-	0.18	-	uC
Diode reverse recovery time	trr		-	70	-	ns
Reverse Recovery Energy	E _{rec}		-	0.06		mJ
Dynamic , at T _j = 150°C						
Reverse Recovery Current	I _{rr}	I _F =50A, V _R =300V di/dt= -437A/μs,	-	8.4	-	A
Reverse Recovery Charge	Q _{rr}		-	0.20	-	uC
Diode reverse recovery time	trr		-	78	-	ns
Reverse Recovery Energy	E _{rec}		-	0.07		mJ

Thermal Resistance



Parameter	Symbol	Max. Value	Unit
IGBT Thermal Resistance, Junction - Case	R _{th(j-c)}	0.42	K/W
Diode Thermal Resistance, Junction - Case	R _{th(j-c)}	1.05	K/W
Thermal Resistance, Junction - Ambient	R _{th(j-a)}	40	K/W

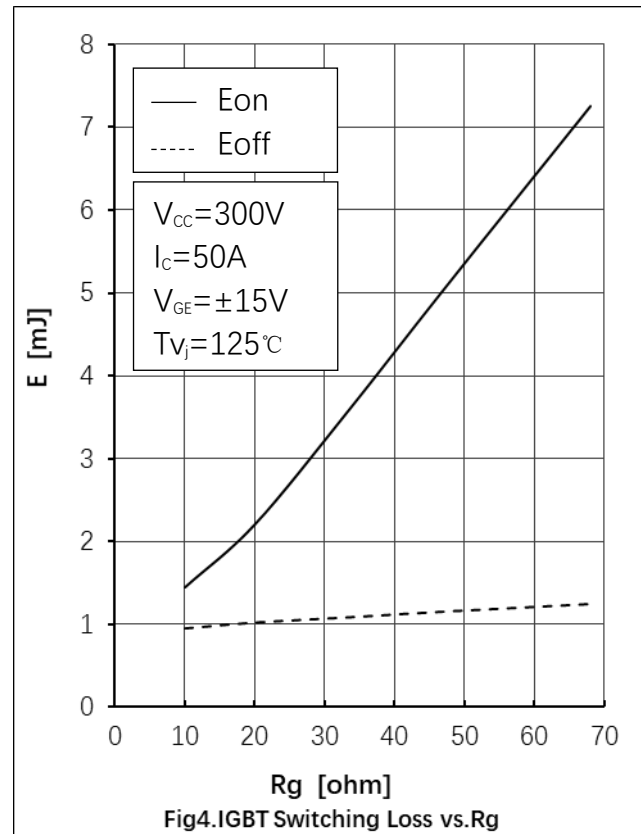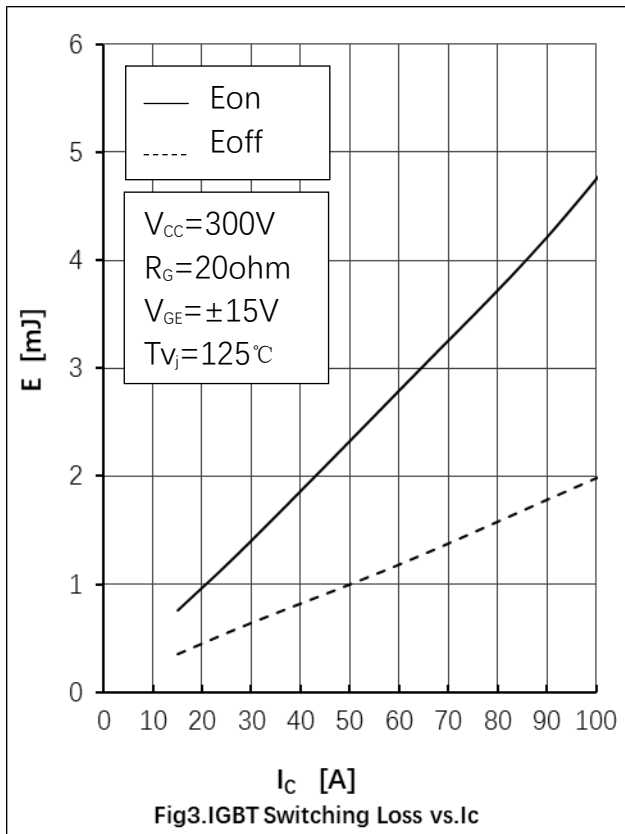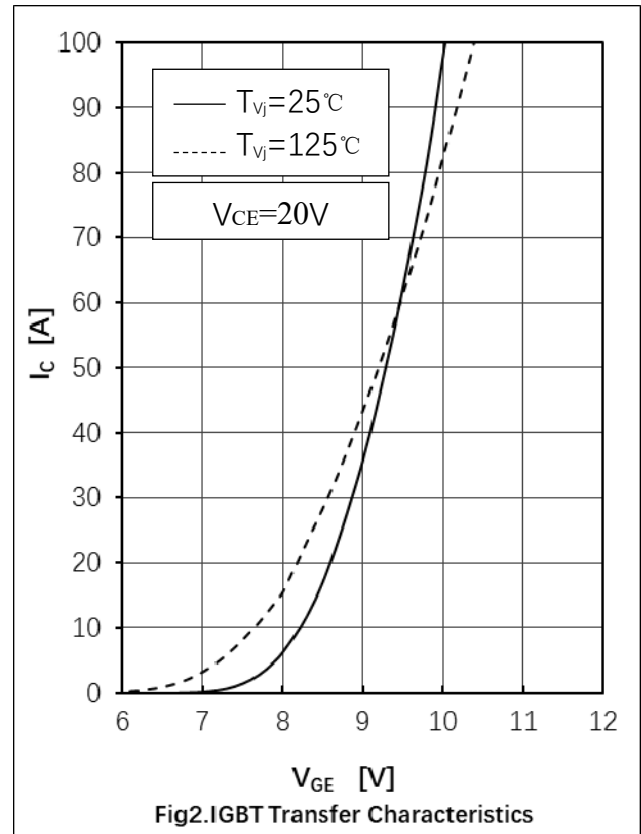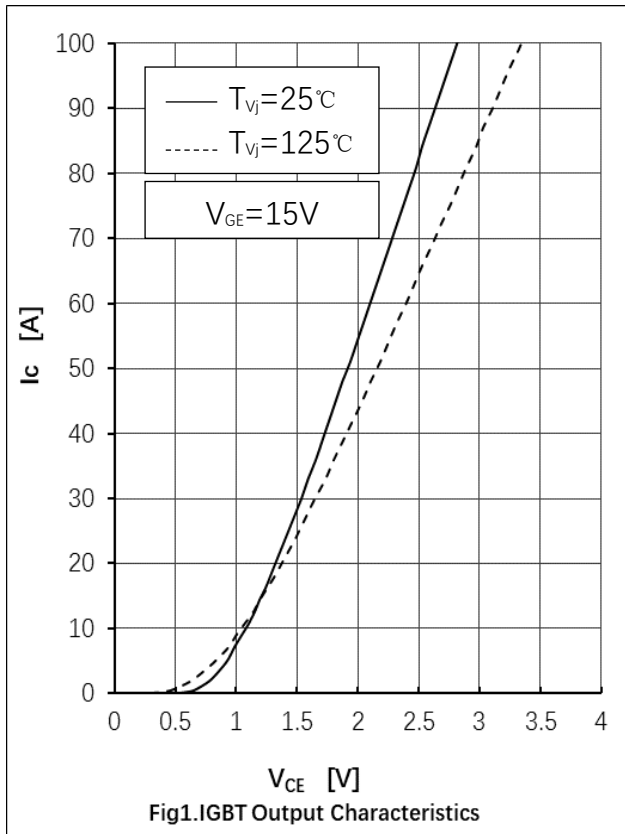

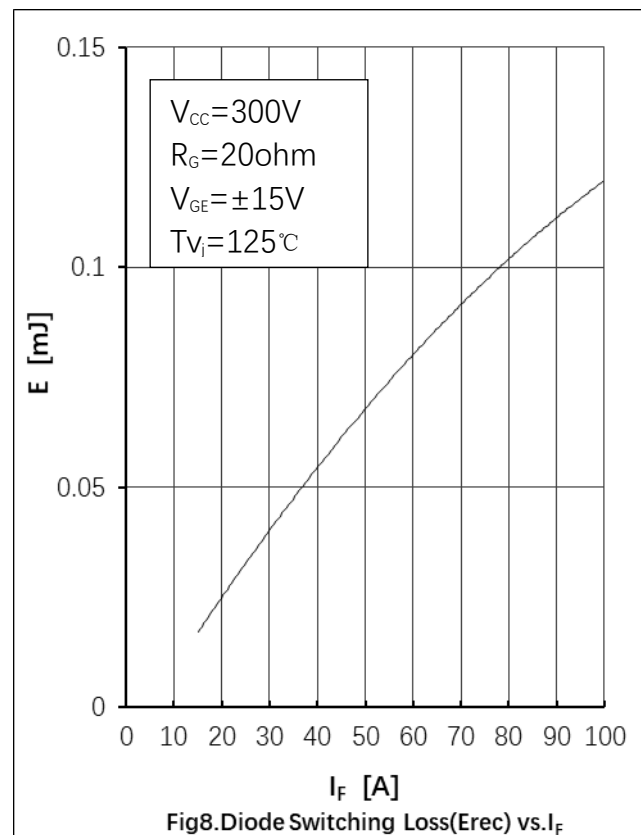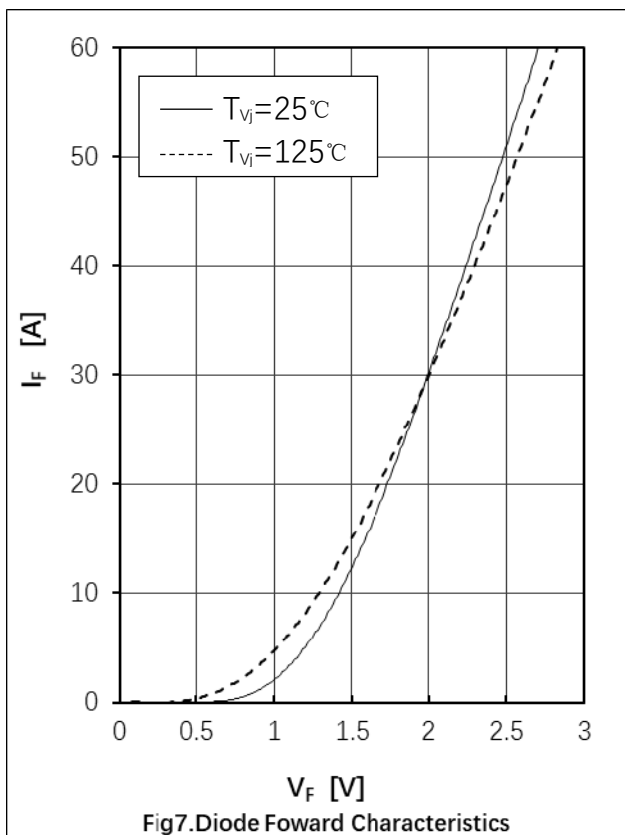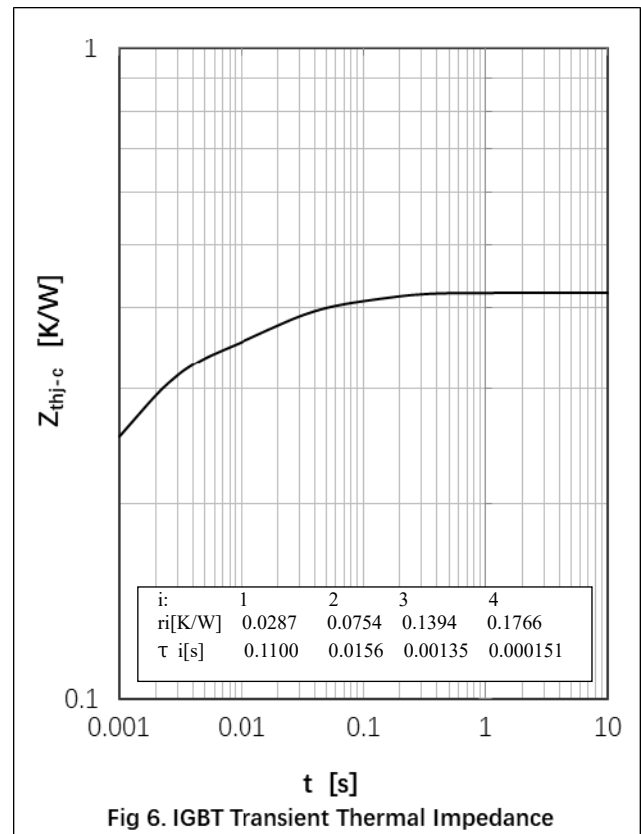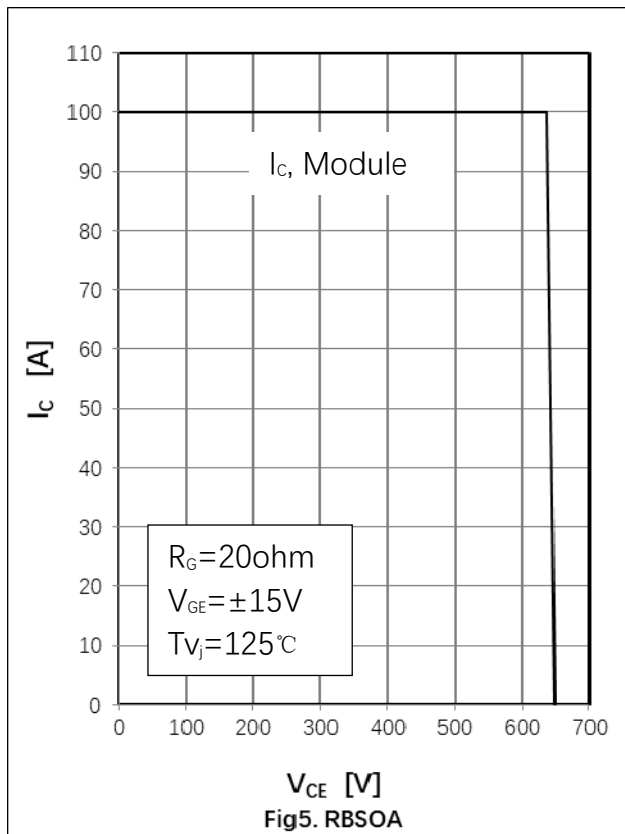

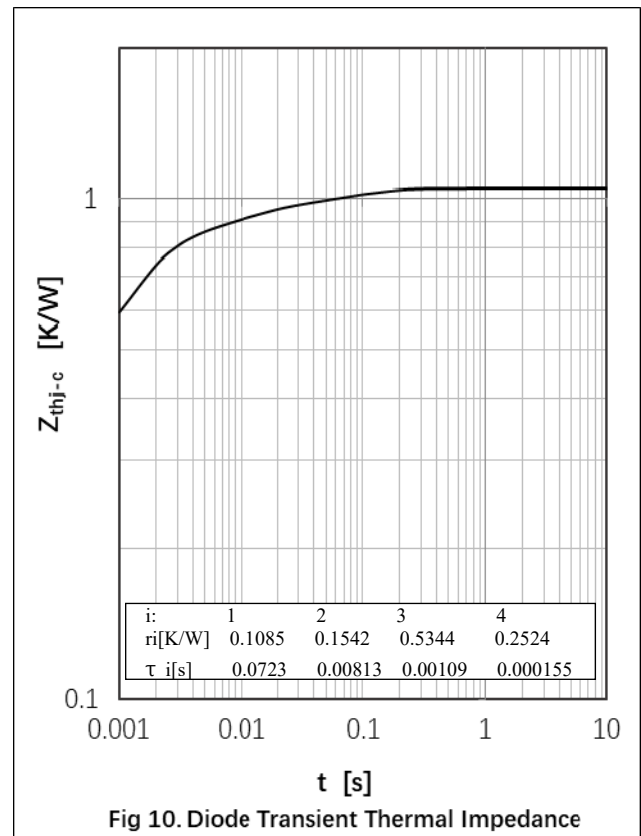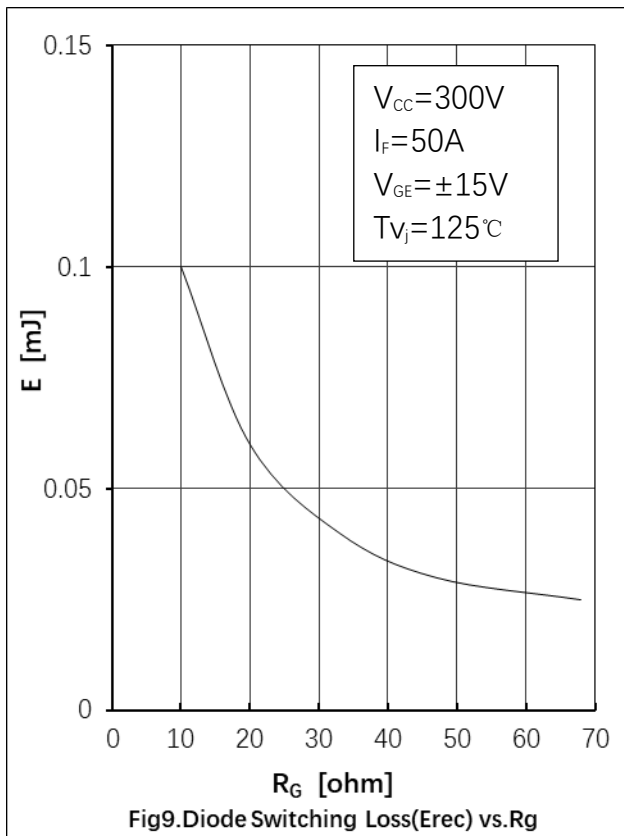

● Circuit Diagram



● Package Outline Information

CASE: TO 247

