

isc Silicon NPN Power Transistor

2N4910

DESCRIPTION

- Collector-Emitter Sustaining Voltage-
: $V_{CEO(SUS)} = 40V(\text{Min})$
- Low Collector Saturation Voltage-
: $V_{CE(sat)} = 0.6V(\text{Max.}) @ I_C = 1A$
- Wide Area of Safe Operation

APPLICATIONS



- Designed for driver circuits, switching and amplifier applications.

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	40	V
V_{CEO}	Collector-Emitter Voltage	40	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current-Continuous	1	A
I_{CM}	Collector Current-Peak	4	A
I_B	Collector Current-Continuous	1	A
P_C	Collector Power Dissipation @ $T_C=25^{\circ}C$	25	W
T_J	Junction Temperature	200	$^{\circ}C$
T_{stg}	Storage Temperature Range	-65~200	$^{\circ}C$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	7.0	$^{\circ}C/W$

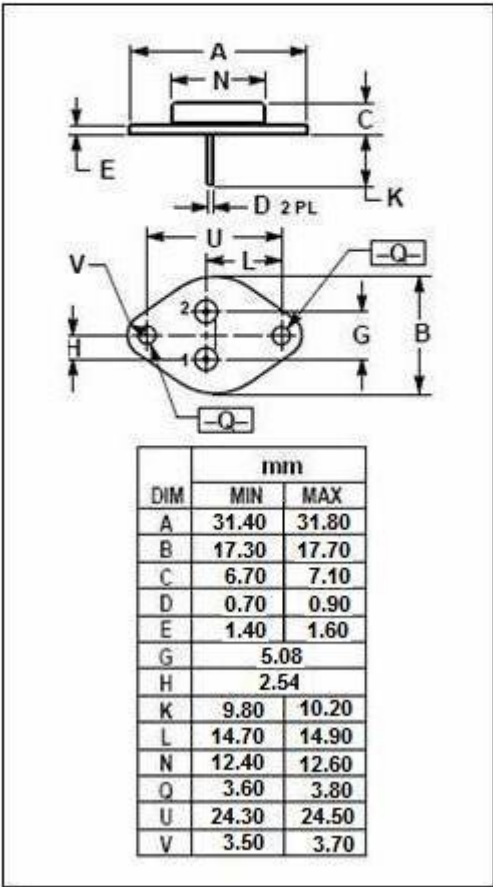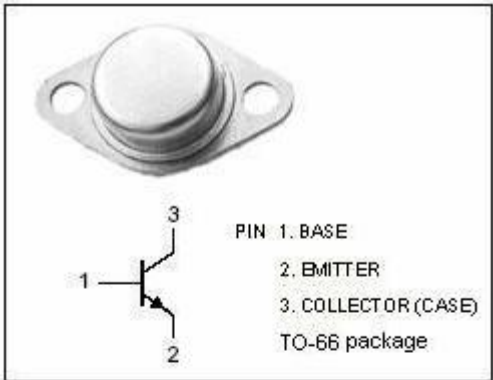

isc Silicon NPN Power Transistor**2N4910****ELECTRICAL CHARACTERISTICS** **$T_C=25^{\circ}\text{C}$ unless otherwise specified**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C = 100\text{mA}; I_B = 0$	40			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = 1\text{A}; I_B = 0.1\text{A}$			0.6	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C = 1\text{A}; I_B = 0.1\text{A}$			1.3	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C = 1\text{A}; V_{CE} = 1\text{V}$			1.3	V
I_{CEX}	Collector Cutoff Current	$V_{CE} = 40\text{V}; V_{BE(off)} = 1.5\text{V}$ $V_{CE} = 40\text{V}; V_{BE(off)} = 1.5\text{V}; T_C = 150^{\circ}\text{C}$			0.1 1.0	mA
I_{CEO}	Collector Cutoff Current	$V_{CE} = 20\text{V}; I_B = 0$			0.5	mA
I_{CBO}	Collector Cutoff Current	$V_{CB} = 40\text{V}; I_E = 0$			0.1	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = 5\text{V}; I_C = 0$			1.0	mA
h_{FE-1}	DC Current Gain	$I_C = 50\text{mA}; V_{CE} = 1\text{V}$	40			
h_{FE-2}	DC Current Gain	$I_C = 500\text{mA}; V_{CE} = 1\text{V}$	20		100	
h_{FE-3}	DC Current Gain	$I_C = 1\text{A}; V_{CE} = 1\text{V}$	10			
f_T	Current-Gain—Bandwidth Product	$I_C = 0.25\text{A}; V_{CE} = 10\text{V}; f_{test} = 1\text{MHz}$	3			MHz
C_{OB}	Output Capacitance	$I_E = 0; V_{CB} = 10\text{V}; f_{test} = 100\text{kHz}$			100	pF