
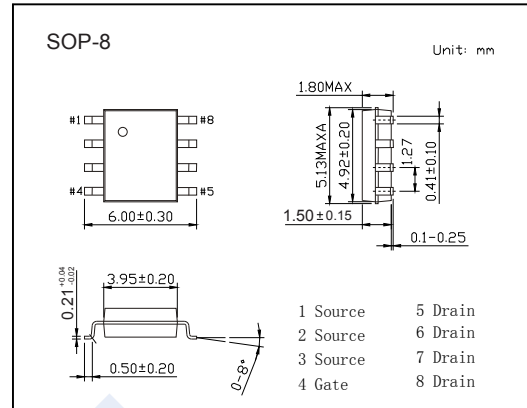


## P-Channel MOSFET

### AO4407A (KO4407A)

#### ■ Features

- $V_{DS} (V) = -30V$
- $I_D = -12 A (V_{GS} = -20V)$
- $R_{DS(ON)} < 11m\Omega (V_{GS} = -20V)$
- $R_{DS(ON)} < 13m\Omega (V_{GS} = -10V)$
- $R_{DS(ON)} < 17m\Omega (V_{GS} = -6V)$



#### ■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit	
Drain-Source Voltage	$V_{DS}$	-30	V	
Gate-Source Voltage	$V_{GS}$	$\pm 25$		
Continuous Drain Current	$I_D$	$T_A = 25^\circ C$	A	
		$T_A = 70^\circ C$		-10
Pulsed Drain Current	$I_{DM}$	-60	A	
Avalanche Current	$I_{AR}$	-26		
Avalanche energy	$L = 0.3mH$	$E_{AR}$	101	mJ
Power Dissipation	$P_D$	$T_A = 25^\circ C$	3.1	W
		$T_A = 70^\circ C$	2	
Thermal Resistance.Junction- to-Ambient	$R_{thJA}$	$t \leq 10s$	40	$^\circ C/W$
		Steady-State	75	
Thermal Resistance.Junction- to-Lead	$R_{thJL}$	24		
Junction Temperature	$T_J$	150	$^\circ C$	
Junction Storage Temperature Range	$T_{stg}$	-55 to 150		

## P-Channel MOSFET

### AO4407A (KO4407A)

#### ■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	V <sub>DSS</sub>	I <sub>D</sub> =-250 μA, V <sub>GS</sub> =0V	-30			V
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> =-30V, V <sub>GS</sub> =0V			-1	μA
		V <sub>DS</sub> =-30V, V <sub>GS</sub> =0V, T <sub>J</sub> =55°C			-5	
Gate-Body leakage current	I <sub>GSS</sub>	V <sub>DS</sub> =0V, V <sub>GS</sub> =±25V			±100	nA
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> =V <sub>GS</sub> I <sub>D</sub> =-250 μA	-1.7		-3	V
Static Drain-Source On-Resistance	R <sub>DS(on)</sub>	V <sub>GS</sub> =-20V, I <sub>D</sub> =-12A			11	mΩ
		V <sub>GS</sub> =-20V, I <sub>D</sub> =-12A T <sub>J</sub> =125°C			15	
		V <sub>GS</sub> =-10V, I <sub>D</sub> =-12A			13	
		V <sub>GS</sub> =-6V, I <sub>D</sub> =-10A			17	
On state drain current	I <sub>D(ON)</sub>	V <sub>GS</sub> =-10V, V <sub>DS</sub> =-5V	-60			A
Forward Transconductance	g <sub>FS</sub>	V <sub>DS</sub> =-5V, I <sub>D</sub> =-10A		21		S
Input Capacitance	C <sub>iss</sub>	V <sub>GS</sub> =0V, V <sub>DS</sub> =-15V, f=1MHz		2060	2600	pF
Output Capacitance	C <sub>oss</sub>			370		
Reverse Transfer Capacitance	C <sub>rss</sub>			295		
Gate resistance	R <sub>g</sub>	V <sub>GS</sub> =0V, V <sub>DS</sub> =0V, f=1MHz		2.4	3.6	Ω
Total Gate Charge	Q <sub>g</sub>	V <sub>GS</sub> =-10V, V <sub>DS</sub> =-15V, I <sub>D</sub> =-12A		30	39	nC
Gate Source Charge	Q <sub>gs</sub>			4.6		
Gate Drain Charge	Q <sub>gd</sub>			10		
Turn-On DelayTime	t <sub>d(on)</sub>	V <sub>GS</sub> =-10V, V <sub>DS</sub> =-15V, R <sub>L</sub> =1.25Ω, R <sub>GEN</sub> =3Ω		11		ns
Turn-On Rise Time	t <sub>r</sub>			9.4		
Turn-Off DelayTime	t <sub>d(off)</sub>			24		
Turn-Off Fall Time	t <sub>f</sub>			12		
Body Diode Reverse Recovery Time	t <sub>rr</sub>	I <sub>F</sub> =-12A, di/dt=100A/us		30	40	nC
Body Diode Reverse Recovery Charge	Q <sub>rr</sub>			22		
Maximum Body-Diode Continuous Current	I <sub>S</sub>				-3	A
Diode Forward Voltage	V <sub>SD</sub>	I <sub>S</sub> =-1A, V <sub>GS</sub> =0V			-1	V

Note : The static characteristics in Figures 1 to 6 are obtained using <300 μs pulses, duty cycle 0.5% max.

#### ■ Marking

Marking	4407A KC****
---------	-----------------

## P-Channel MOSFET AO4407A (KO4407A)

■ Typical Characteristics

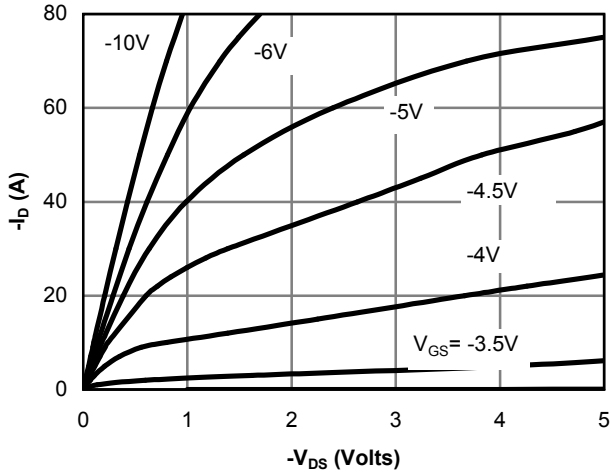


Figure 1: On-Region Characteristics

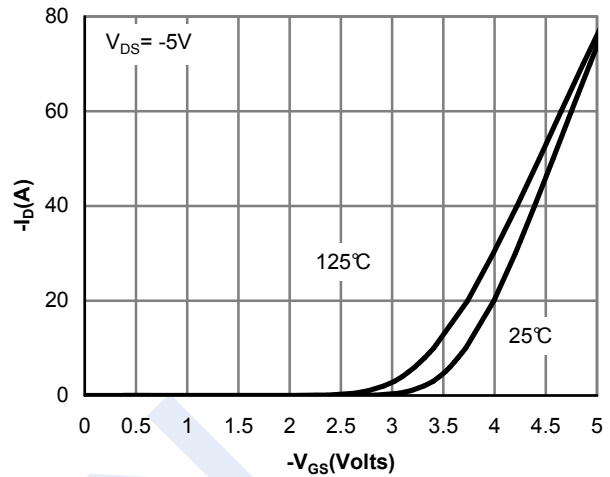


Figure 2: Transfer Characteristics

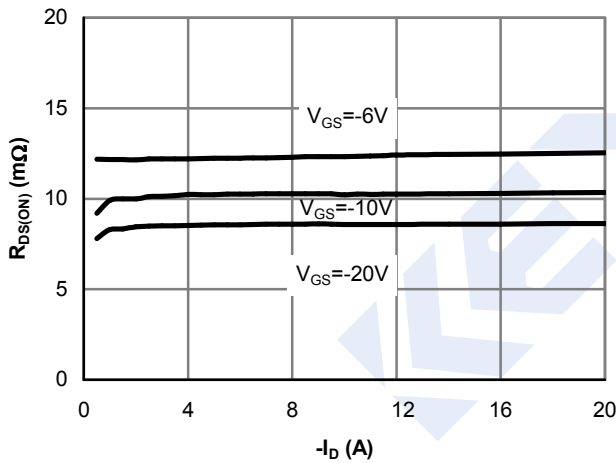


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

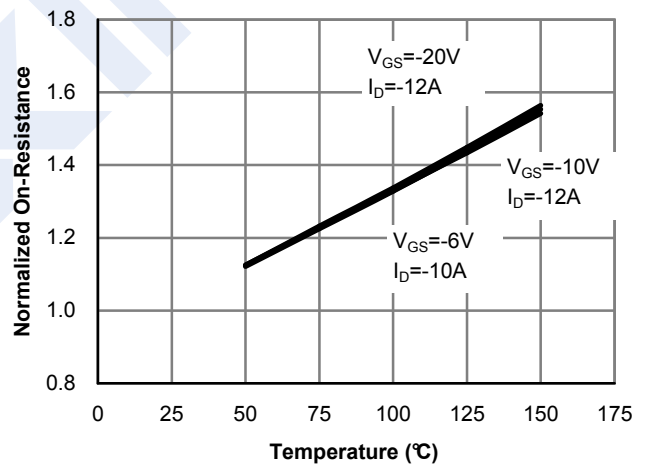


Figure 4: On-Resistance vs. Junction Temperature

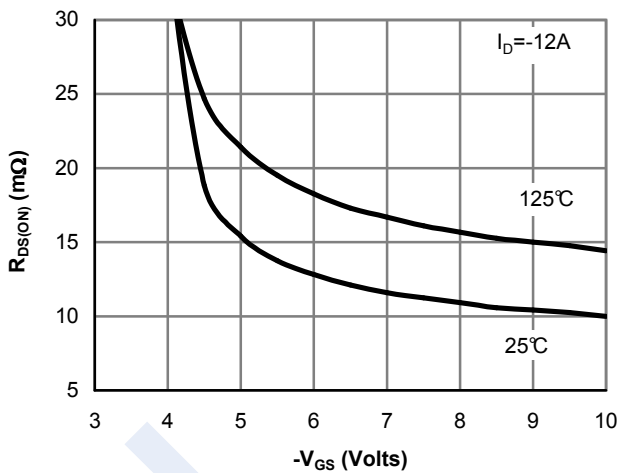


Figure 5: On-Resistance vs. Gate-Source Voltage

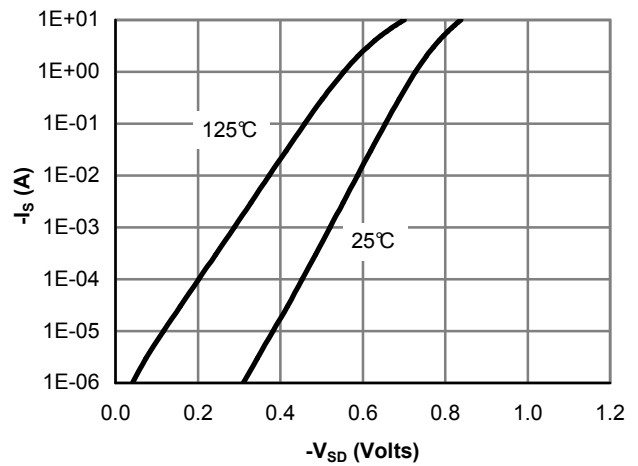


Figure 6: Body-Diode Characteristics

## P-Channel MOSFET AO4407A (KO4407A)

■ Typical Characteristics

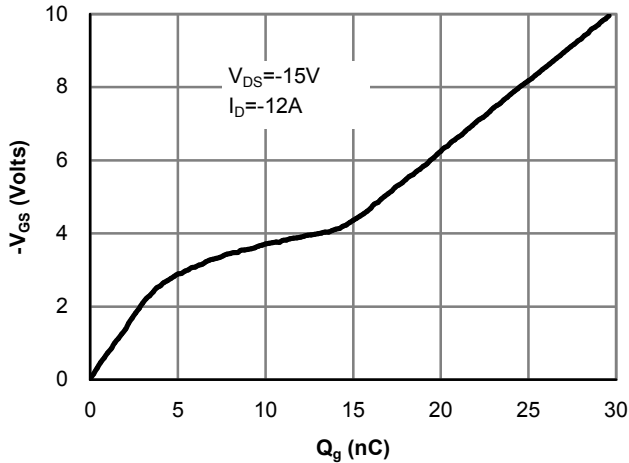


Figure 7: Gate-Charge Characteristics

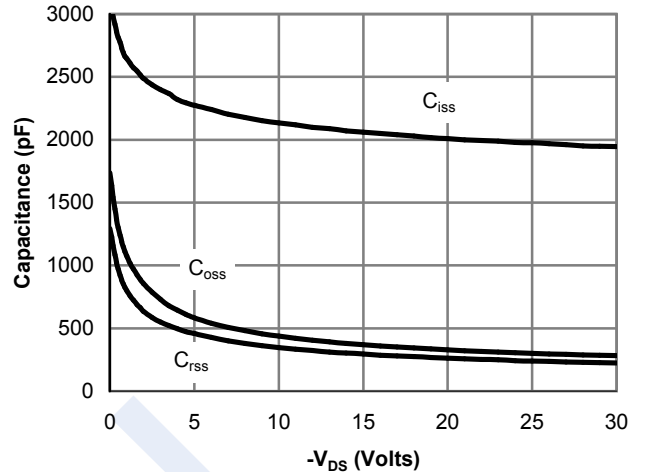


Figure 8: Capacitance Characteristics

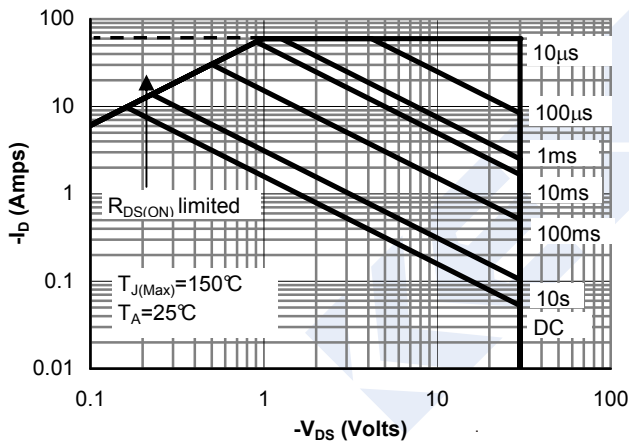


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

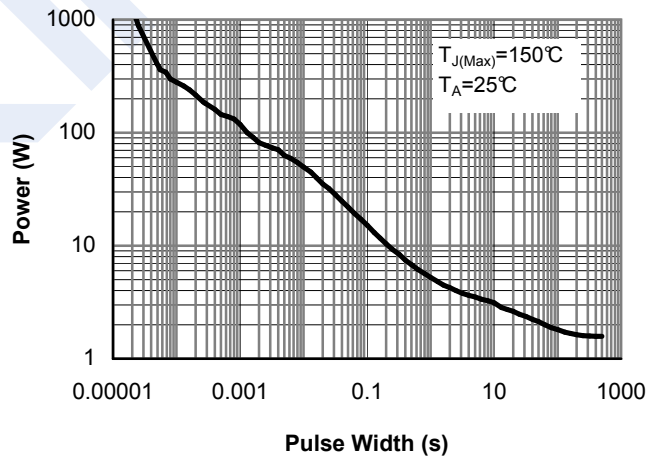


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)

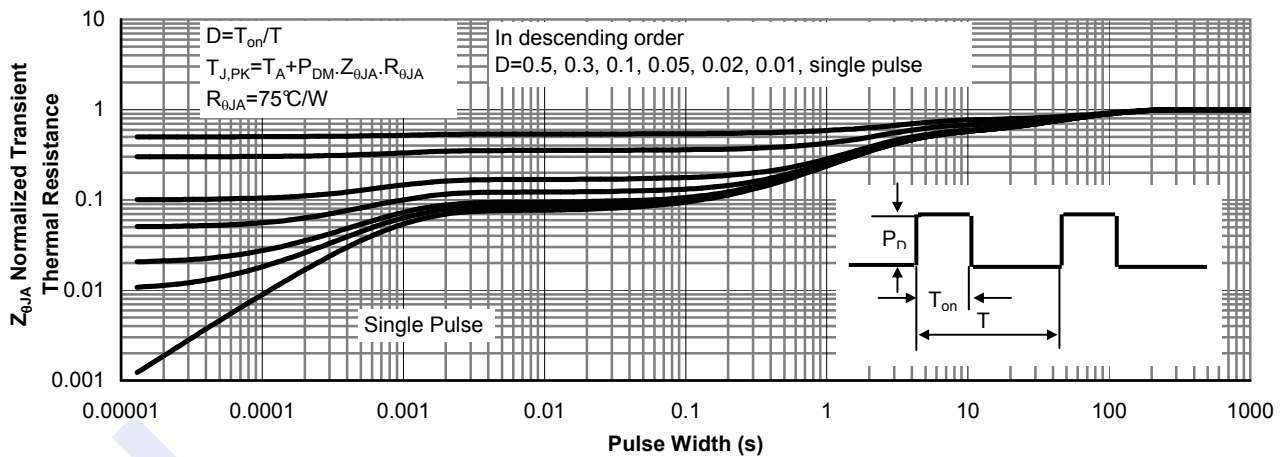


Figure 11: Normalized Maximum Transient Thermal Impedance (Note E)