



MMG400D060UK6N

600V 400A IGBT Module

RoHS Compliant

July 2010

PRELIMINARY

FEATURES

- Ultra Low Loss
- High Ruggedness
- High Short Circuit Capability
- Positive Temperature Coefficient
- Integrated Gate Resistor

APPLICATIONS

- Invector
- Convertor
- Welder
- SMPS and UPS
- Induction Heating



ABSOLUTE MAXIMUM RATINGS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Values	Unit
IGBT				
V_{CES}	Collector - Emitter Voltage		600	V
V_{GES}	Gate - Emitter Voltage		± 20	V
I_C	DC Collector Current	$T_C=25^{\circ}\text{C}$	460	A
		$T_C=50^{\circ}\text{C}$	400	A
I_{Cpuls}	Pulsed Collector Current	$T_C=25^{\circ}\text{C}$, $t_p=1\text{ms}$	920	A
		$T_C=50^{\circ}\text{C}$, $t_p=1\text{ms}$	800	A
P_{tot}	Power Dissipation Per IGBT		1400	W
T_J	Junction Temperature Range		-40 to +150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range		-40 to +125	$^{\circ}\text{C}$
V_{isol}	Insulation Test Voltage	AC, $t=1\text{min}$	3000	V
Free-Wheeling Diode				
V_{RRM}	Repetitive Reverse Voltage		600	V
$I_{F(AV)}$	Average Forward Current	$T_C=25^{\circ}\text{C}$	400	A
		$T_C=50^{\circ}\text{C}$	320	A
$I_{F(RMS)}$	RMS Forward Current		570	A
I_{FSM}	Non-Repetitive Surge	$T_J=45^{\circ}\text{C}$, $t=10\text{ms}$, Sine	1200	A
	Forward Current	$T_J=45^{\circ}\text{C}$, $t=8.3\text{ms}$, Sine	1320	A

MacMic Science & Technology Co., Ltd.

Add: #18, Hua Shan Zhong Lu, New District, Changzhou City, Jiangsu Province, P. R .of China

Tel.: +86-519-85163708 Fax: +86-519-85162291 Post Code: 213022 Website: www.macmicst.com

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
IGBT						
$V_{GE(th)}$	Gate - Emitter Threshold Voltage	$V_{CE}=V_{GE}$, $I_C=8\text{mA}$	4.5	5.5	6.5	V
$V_{CE(sat)}$	Collector - Emitter Saturation Voltage	$I_C=400\text{A}$, $V_{GE}=15\text{V}$, $T_J=25^{\circ}\text{C}$		1.95	2.45	V
		$I_C=400\text{A}$, $V_{GE}=15\text{V}$, $T_J=125^{\circ}\text{C}$		2.2		V
I_{CES}	Collector Leakage Current	$V_{CE}=600\text{V}$, $V_{GE}=0\text{V}$, $T_J=25^{\circ}\text{C}$			1	mA
		$V_{CE}=600\text{V}$, $V_{GE}=0\text{V}$, $T_J=125^{\circ}\text{C}$		2		mA
I_{GES}	Gate Leakage Current	$V_{CE}=0\text{V}$, $V_{GE}=\pm 20\text{V}$	-1.2		1.2	μA
R_{Gint}	Integrated Gate Resistor			2.5	3.5	Ω
Q_{ge}	Gate Charge	$V_{CC}=300\text{V}$, $I_C=400\text{A}$, $V_{GE}=\pm 15\text{V}$		1780		nC
C_{ies}	Input Capacitance	$V_{CE}=25\text{V}$, $V_{GE}=0\text{V}$, $f=1\text{MHz}$		18		nF
C_{oes}	Output Capacitance			1.8		nF
C_{res}	Reverse Transfer Capacitance			1.6		nF
$t_{d(on)}$	Turn - on Delay Time	$V_{CC}=300\text{V}$, $I_C=400\text{A}$		195		ns
t_r	Rise Time	$R_G=3\Omega$, $V_{GE}=\pm 15\text{V}$		65		ns
$t_{d(off)}$	Turn - off Delay Time	$T_J=25^{\circ}\text{C}$		295		ns
t_f	Fall Time	Inductive Load		45		ns
$t_{d(on)}$	Turn - on Delay Time	$V_{CC}=300\text{V}$, $I_C=400\text{A}$		220		ns
t_r	Rise Time	$R_G=3\Omega$, $V_{GE}=\pm 15\text{V}$		80		ns
$t_{d(off)}$	Turn - off Delay Time	$T_J=125^{\circ}\text{C}$		350		ns
t_f	Fall Time	Inductive Load		60		ns
E_{on}	Turn - on Switching Energy	$V_{CC}=300\text{V}$, $I_C=400\text{A}$, $T_J=25^{\circ}\text{C}$		6.5		mJ
		$R_G=3\Omega$		10		mJ
E_{off}	Turn - off Switching Energy	$T_J=125^{\circ}\text{C}$		9.5		mJ
		$V_{GE}=\pm 15\text{V}$, $T_J=25^{\circ}\text{C}$		14.5		mJ
		Inductive Load, $T_J=125^{\circ}\text{C}$				
Free-Wheeling Diode						
V_F	Forward Voltage	$I_F=400\text{A}$, $V_{GE}=0\text{V}$, $T_J=25^{\circ}\text{C}$		1.25	1.6	V
		$I_F=400\text{A}$, $V_{GE}=0\text{V}$, $T_J=125^{\circ}\text{C}$		1.2		V
t_{rr}	Reverse Recovery Time	$I_F=400\text{A}$, $V_R=300\text{V}$		249		ns
I_{RRM}	Max. Reverse Recovery Current	$di_F/dt=-2000\text{A}/\mu\text{s}$		214		A
Q_{rr}	Reverse Recovery Charge	$T_J=125^{\circ}\text{C}$		31		μC

THERMAL AND MECHANICAL CHARACTERISTICS

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
R_{thJC}	Junction-to-Case Thermal Resistance	Per IGBT			0.09	K/W
R_{thJCD}	Junction-to-Case Thermal Resistance	Per Inverse Diode			0.15	K/W
Torque	Module-to-Sink	Recommended (M6)	3		5	N·m
Torque	Module Electrodes	Recommended (M6)	2.5		5	N·m

MMG400D060UK6N

Weight				310		g
--------	--	--	--	-----	--	---

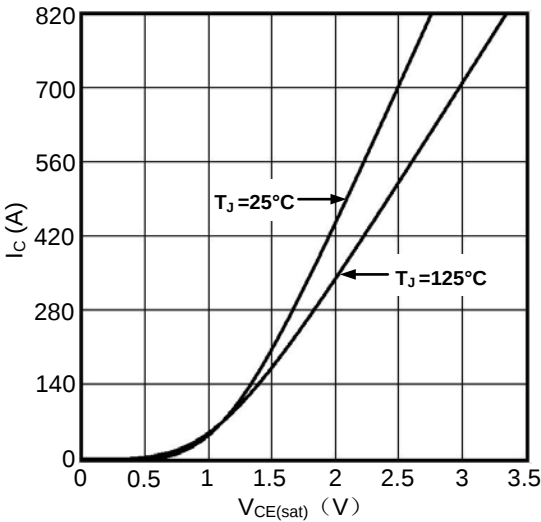


Figure1. Typical Output characteristics

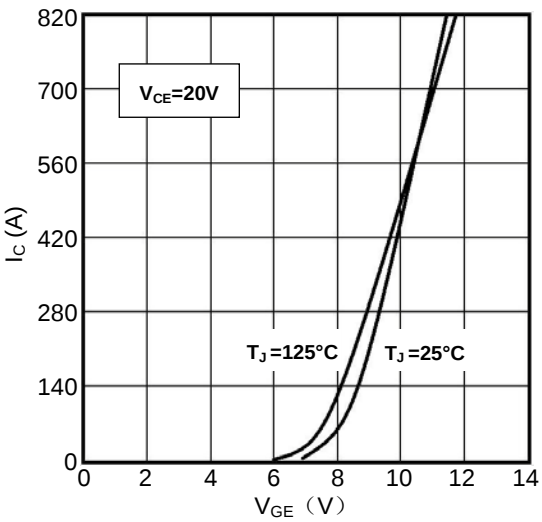


Figure2. Typical Transfer characteristics

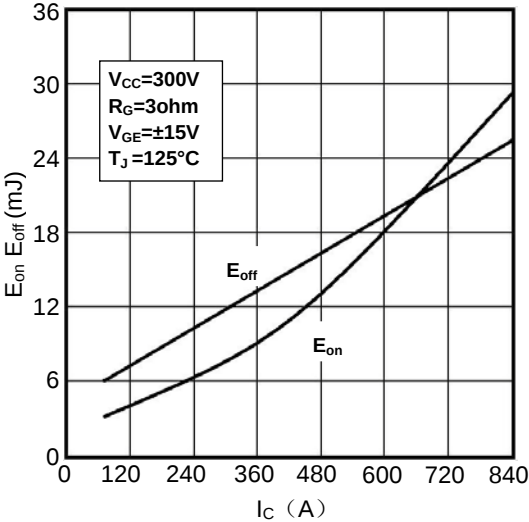


Figure3. Switching Energy vs. Collector Current

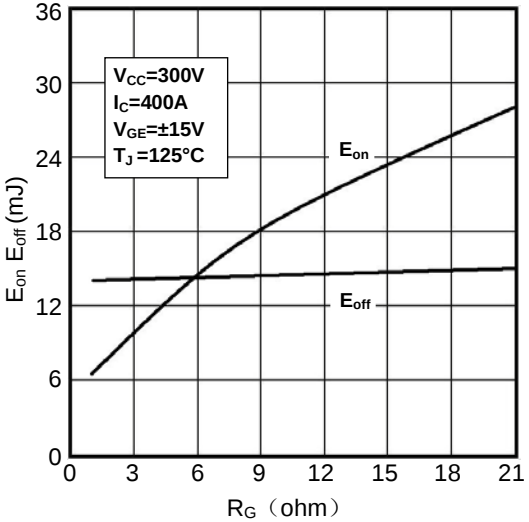


Figure4. Switching Energy vs. Gate Resistor

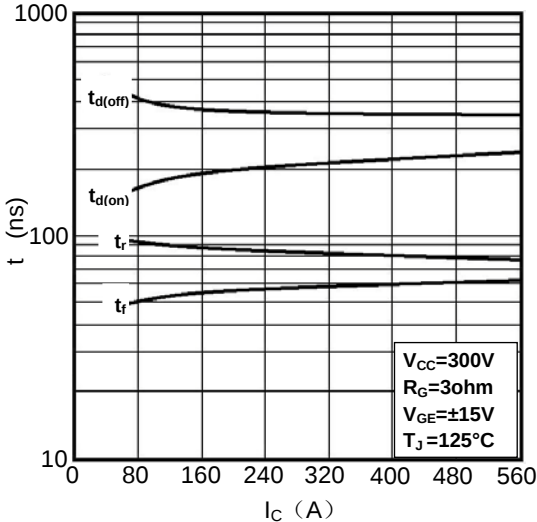


Figure5. Switching Times vs. Collector Current

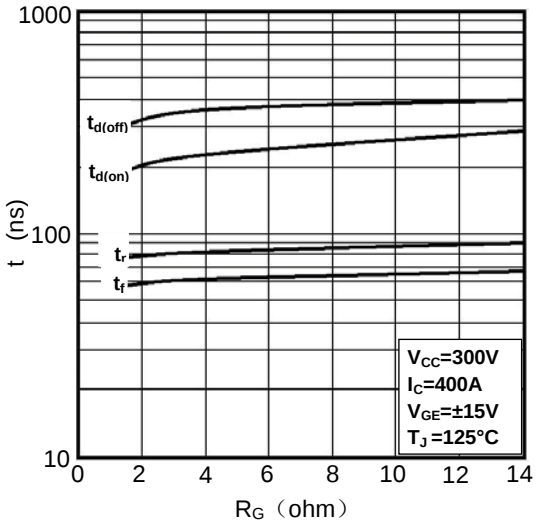


Figure6. Switching Times vs. Gate Resistor

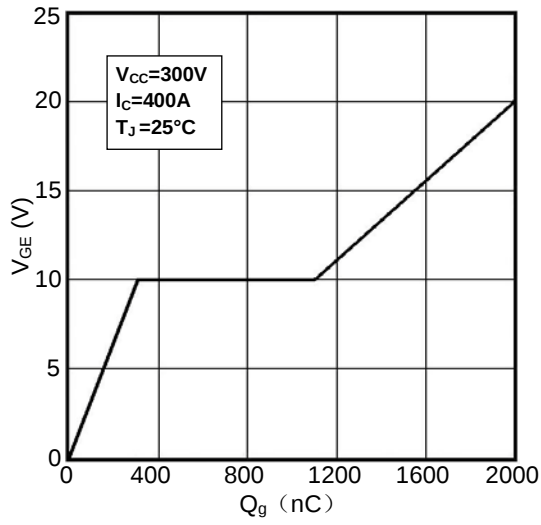


Figure7. Gate Charge characteristics

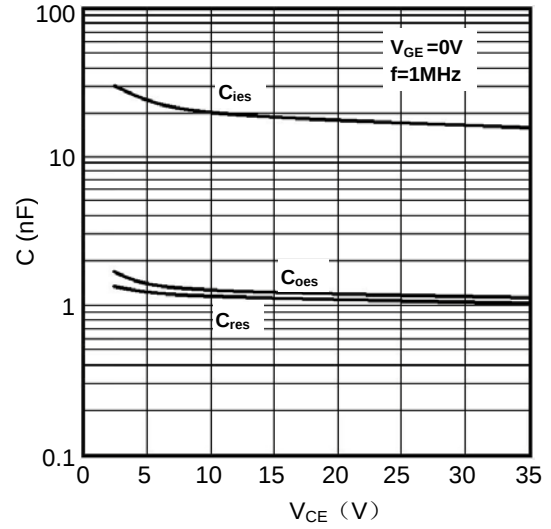


Figure8. Typical Capacitances vs. V_{CE}

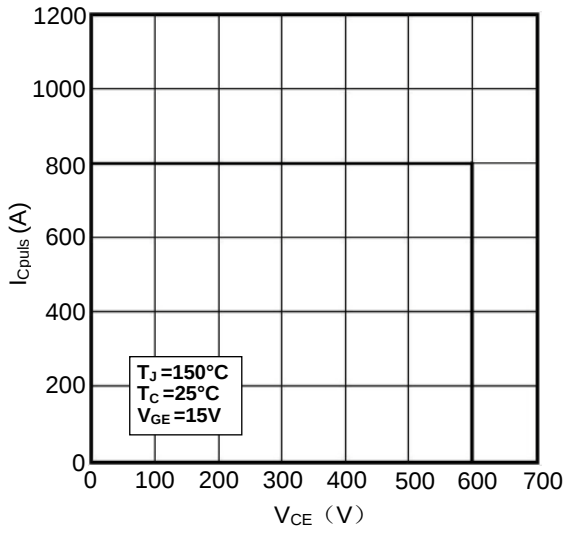


Figure9. Reverse Biased Safe Operating Area

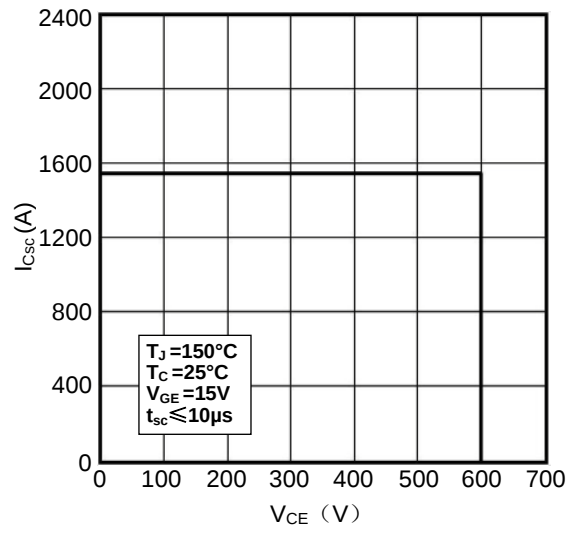


Figure10. Short Circuit Safe Operating Area

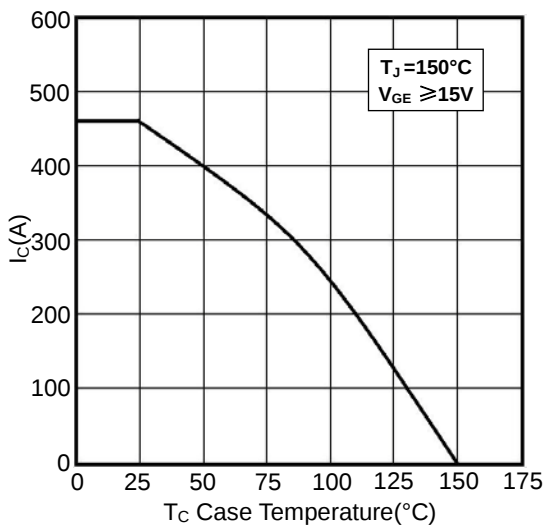


Figure11. Rated Current vs. T_C

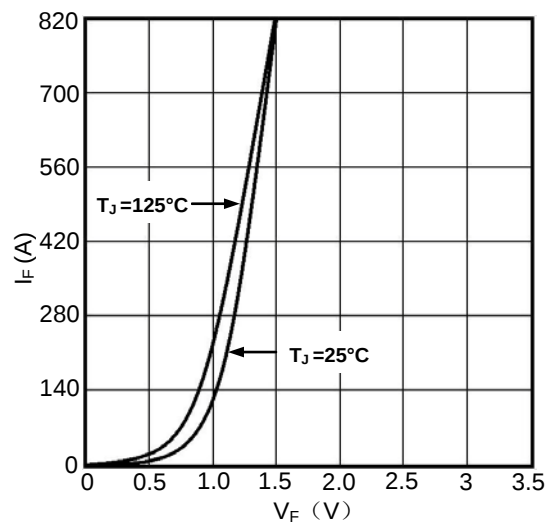


Figure12. Diode Forward Characteristics

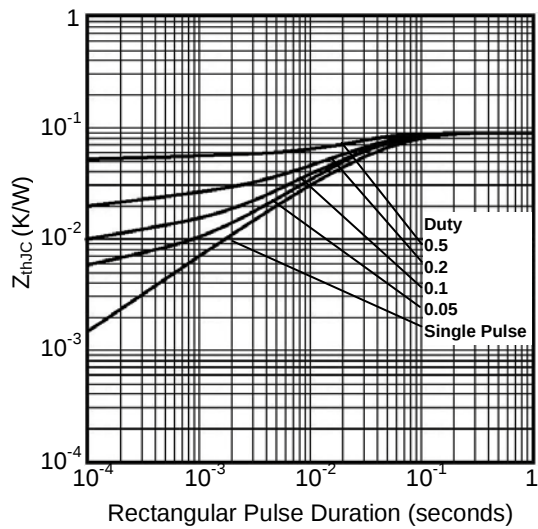


Figure13. Transient Thermal Impedance of IGBT

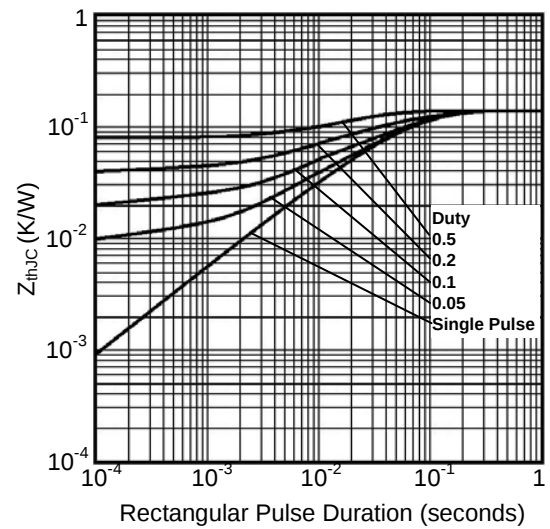


Figure14. Transient Thermal Impedance of Diode

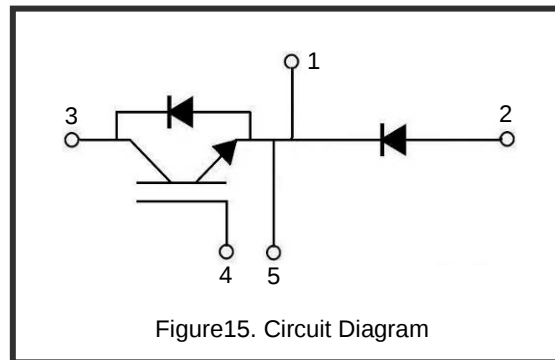


Figure15. Circuit Diagram

