




Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

2SB562

PNP Epitaxial Silicon Transistor

TO-92L

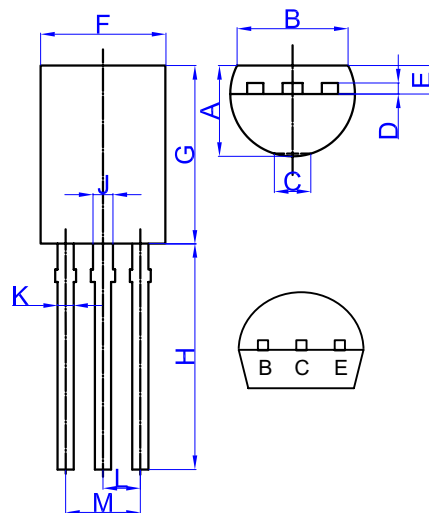

Maximum Ratings

Symbol	Rating	Rating	Unit
V_{CE0}	Collector-Emitter Voltage	-20	V
V_{CBO}	Collector-Base Voltage	-25	V
V_{EBO}	Emitter-Base Voltage	-5.0	V
I_C	Collector Current	-1.0	A
P_C	Collector power dissipation	0.9	W
T_J	Junction Temperature	-55 to +150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature	-55 to +150	$^{\circ}\text{C}$

Electrical Characteristics @ 25 $^{\circ}\text{C}$ Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units
--------	-----------	-----	-----	-----	-------

OFF CHARACTERISTICS

BV_{CBO}	Collector-Base Breakdown Voltage ($I_C = -10 \mu\text{A}$, $I_E = 0$)	-20	---	---	Vdc
BV_{CE0}	Collector-Emitter Breakdown Voltage ($I_C = -1\text{mA}$, $I_E = 0$)	-25	---	---	Vdc
BV_{EBO}	Emitter-Base Breakdown Voltage ($I_E = -0.01\text{mA}$, $I_C = 0$)	-5.0	---	---	Vdc
I_{CBO}	Collector Cutoff Current ($V_{CB} = -20\text{Vdc}$, $I_E = 0$)	---	---	-1000	nAdc
I_{EBO}	Emitter Cutoff Current ($V_{EB} = -4.0\text{Vdc}$, $I_C = 0$)	---	---	-1000	nAdc

ON CHARACTERISTICS


h_{FE}	DC Current gain ($I_C = 500\text{mA}$, $V_{CE} = 2.0\text{Vdc}$)	85	---	240	---
$V_{BE(on)}$	Base-Emitter On Voltage ($V_{CE} = -2.0\text{Vdc}$, $I_C = 500\text{mA}$)	---	---	-1.0	Vdc
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C = -0.8\text{A}$, $I_E = -80\text{mA}$)	---	---	-0.5	Vdc
f_T	Current Gain Bandwidth Product ($V_{CE} = -2.0\text{Vdc}$, $I_C = 500\text{mA}$)	---	350	---	MHz
C_{ob}	Output Capacitance ($V_{CB} = -10\text{Vdc}$, $I_E = 0$, $f = 1.0\text{MHz}$)	---	38	---	pF

(1) h_{FE} Classification B: 85~170, C: 120~240




DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.146	.161	3.700	4.10	
B	.157	---	4.000	---	
C	---	0.063	---	1.600	
D	.014	.018	0.350	0.450	
E	.050	.062	1.280	1.580	
F	.185	.201	4.700	5.100	
G	.307	.323	7.800	8.200	
H	.543	.559	13.80	14.20	
J	.024	.031	.600	.800	
K	.014	.022	0.350	.550	
L	.050	---	1.270	---	
M	.096	.104	2.440	2.640	

2SB562

Typical Characteristics

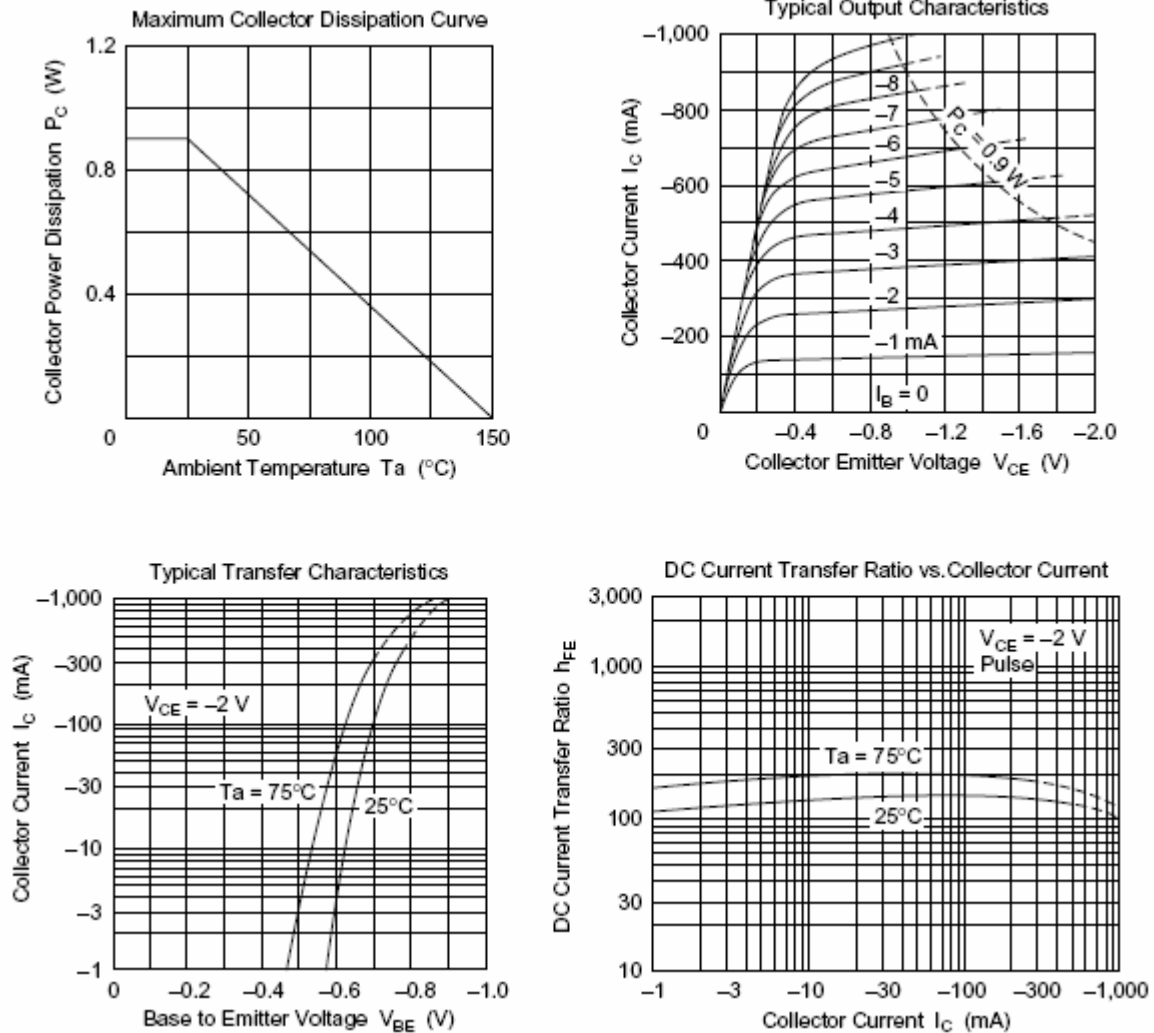

Typical Characteristics

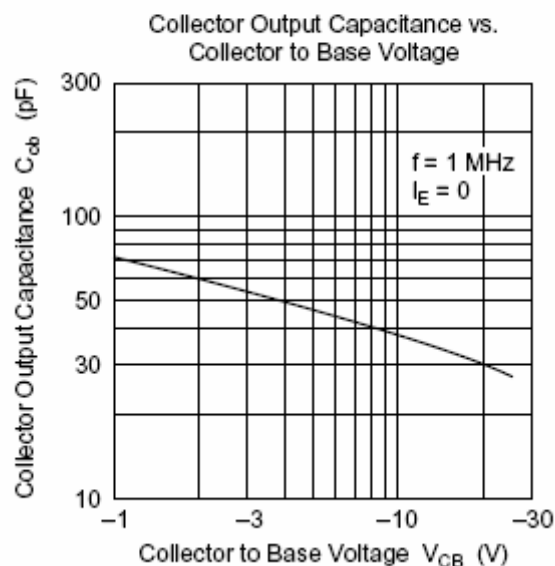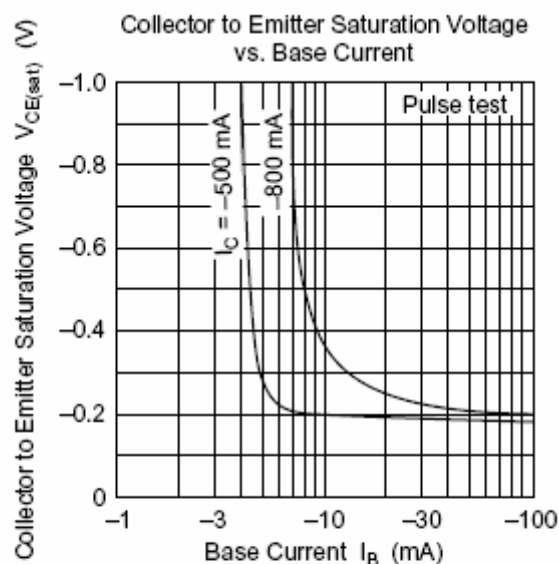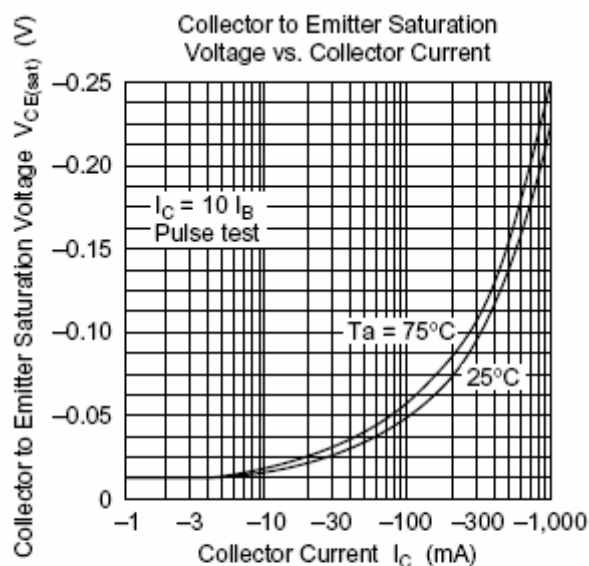

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.