

Pb

Micro Commercial Components

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939

2SC2655-O 2SC2655-Y

Features

- Halogen free available upon request by adding suffix "-HF"
- Collector of 0.9Watts of Power Dissipation.
- Collector-current 2.0A
- Operating and storage junction temperature range: -55°C to +150°C
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Lead Free Finish/Rohs Compliant ("P"Suffix designates RoHS Compliant. See ordering information)


Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage (I _c =10mAdc, I _B =0)	50		Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage (I _C =100uAdc, I _E =0)	50		Vdc
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage (I _E =100uAdc, I _C =0)	5.0		Vdc
I _{CBO}	Collector Cutoff Current 1.0 $(V_{CB}=50Vdc, I_E=0)$		1.0	uAdc
I _{EBO}	Emitter Cutoff Current (V _{EB} =5.0Vdc, I _C =0)		1.0	uAdc
h _{FE(1)}	DC Current Gain 70 2 (I _C =0.5Adc, V _{CE} =2.0Vdc)		240	
h _{FE(2)}	DC Current Gain (I _C =1.5Adc, V _{CE} =2.0Vdc)	40		
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage (I _C =1Adc, I _B =50mAdc)		0.5	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage (I _C =1.0Adc, I _B =50mA)		1.2	Vdc
f⊤	Transistor Frequency (I _C =500mAdc, V _{CE} =2.0Vdc,)	100	100(Typ)	
C _{ob}	Collector output capacitance (I _E =0, V _{CB} =10Vdc,f=1MHz)	30(Typ)		pF
t _{on}	Turn-0n time $(I_{B1}=-I_{B2}=0.05, V_{CC}=30Vdc,I_{C}=1Adc)$	0.15(Typ)		us
ts	Storage time $(I_{B1}=-I_{B2}=0.05, V_{CC}=30Vdc,I_{C}=1Adc)$	2.0(Typ)		us
tf	Fall time (I _{B1} =-I _{B2} =0.05, V _{CC} =30Vdc,I _C =1Adc)	0.15(Typ)		us

CLASSIFICATION OF HFE (1)

Rank	0	Y
Range	70-140	120-240

NPN Plastic-Encapsulate Transistor

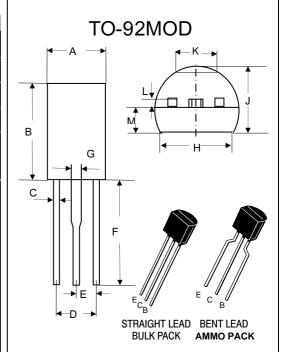

DIMENSIONS							
	INCHES MM						
DIM	MIN	MAX	MIN	MAX	NOTE		
Α	.228	.244	5.80	6.20			
В	.331	.346	8.40	8.80			
С	.016	.024	0.40	0.60			
D	.114	.122	2.90	3.10	Straight Lead		
	.173	.220	4.40	5.60	Bent Lead		
Е	.059		1.50		Straight Lead		
_	.086	.110	2.20	2.80	Bent Lead		
F	.543	.559	13.80	14.20			
G	.035	.043	0.90	1.10			
Н	.157		4.00				
J	.185	.201	4.70	5.10			
K		.063		1.60			
Ĺ	.016	.020	0.40	0.50			
М	.068	.080	1.73	2.03			

^{*} For ammo packing detailed specification, click here to visit our website of product packaging for details.

www.mccsemi.com



Micro Commercial Components

Ordering Information:

Device	Packing	
Part Number-AP	Ammo Packing: 20Kpcs/Ammo Box	
Part Number-BP	Bulk: 50Kpcs/Carton	

Note: Adding "-HF" suffix for halogen free, eg. Part Number-AP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.