




N-Channel Enhancement Mode Field Effect Transistor

PRODUCT SUMMARY

V _{DSS}	I _D	R _{DS(ON)} (Ω) Typ
650V	4A	2.3 @ V _{GS} =10V

FEATURES

- Super high dense cell design for low R_{DS(ON)}.
- Rugged and reliable.
- TO-220 and TO-220F Package.



ORDERING INFORMATION

Ordering Code	Package	Marking Code	Delivery Mode	RoHS Status
SDP04N65HZ	TO-220	SDP04N65	Tube	Halogen Free
SDP04N65PZ	TO-220	04N65	Tube	Pb Free
SDF04N65HZ	TO-220F	SDF04N65	Tube	Halogen Free
SDF04N65PZ	TO-220F	04N65	Tube	Pb Free

ABSOLUTE MAXIMUM RATINGS (T_C=25°C unless otherwise noted)

Symbol	Parameter	SDP04N65	SDF04N65	Units
V _{DS}	Drain-Source Voltage	650		V
V _{GS}	Gate-Source Voltage	±30	±30	V
I _D	Drain Current-Continuous ^a	T _C =25°C	4	A
		T _C =100°C	2.8	A
I _{DM}	-Pulsed ^a	12	12	A
E _{AS}	Single Pulse Avalanche Energy ^c	324		mJ
P _D	Maximum Power Dissipation	T _C =25°C	94	W
		T _C =100°C	47	W
T _J , T _{STG}	Operating Junction and Storage Temperature Range	-55 to 175		°C

THERMAL CHARACTERISTICS

R _{θJC}	Thermal Resistance, Junction-to-Case	1.6	4.8	°C/W
R _{θJA}	Thermal Resistance, Junction-to-Ambient	62.5	62.5	°C/W

SDP04N65

SDF04N65

Ver 2.2

ELECTRICAL CHARACTERISTICS (T_C=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
OFF CHARACTERISTICS						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =250uA	650			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =520V , V _{GS} =0V			1	uA
I _{GSS}	Gate-Body Leakage Current	V _{GS} = ±30V , V _{DS} =0V			±100	nA
ON CHARACTERISTICS						
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250uA	2	3	4	V
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =10V , I _D =2A		2.3	2.8	ohm
g _{FS}	Forward Transconductance	V _{DS} =20V , I _D =2A		2.9		S
DYNAMIC CHARACTERISTICS ^b						
C _{ISS}	Input Capacitance	V _{DS} =25V,V _{GS} =0V f=1.0MHz		500		pF
C _{OSS}	Output Capacitance			57		pF
C _{RSS}	Reverse Transfer Capacitance			14		pF
SWITCHING CHARACTERISTICS ^b						
t _{D(ON)}	Turn-On Delay Time	V _{DD} =325V I _D =1A V _{GS} =10V R _{GEN} = 6 ohm		20		ns
t _r	Rise Time			17		ns
t _{D(OFF)}	Turn-Off Delay Time			24		ns
t _f	Fall Time			11		ns
Q _g	Total Gate Charge	V _{DS} =325V,I _D =1A,V _{GS} =10V		11.5		nC
Q _{gs}	Gate-Source Charge	V _{DS} =325V,I _D =1A, V _{GS} =10V		2		nC
Q _{gd}	Gate-Drain Charge			5.3		nC
DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS						
V _{SD}	Diode Forward Voltage	V _{GS} =0V,I _S =1A		0.77	1.4	V
Notes						
a.Drain current limited by maximum junction temperatrue.						
b.Guaranteed by design, not subject to production testing.						
c.Starting T _J =25°C,L=50mH,V _{DD} = 50V.(See Figure12)						

Dec,24,2013

SDP04N65

SDF04N65

Ver 2.2

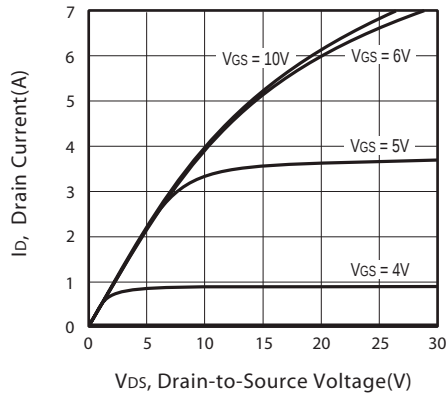


Figure 1. Output Characteristics

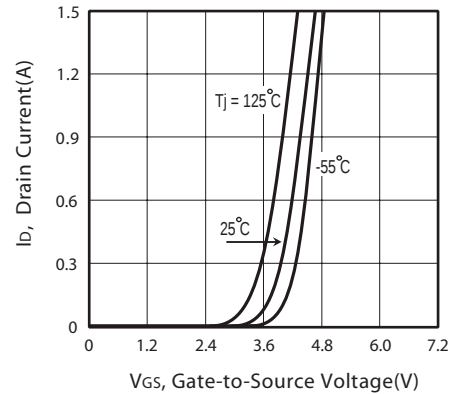


Figure 2. Transfer Characteristics

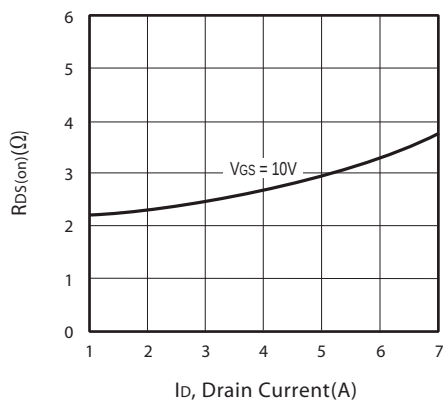


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

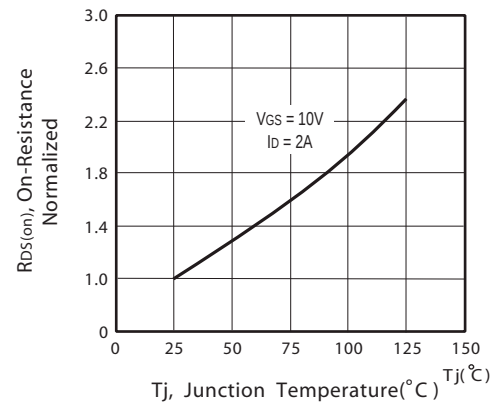


Figure 4. On-Resistance Variation with Drain Current and Temperature

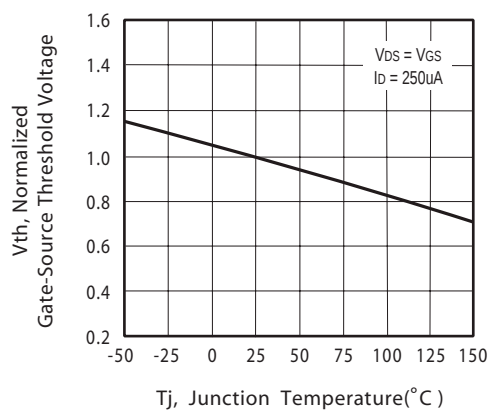


Figure 5. Gate Threshold Variation with Temperature

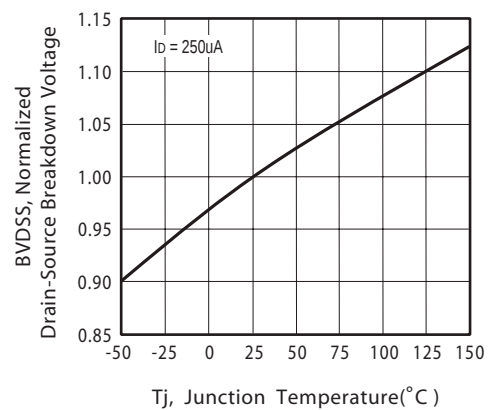


Figure 6. Breakdown Voltage Variation with Temperature

Dec,24,2013

SDP04N65

SDF04N65

Ver 2.2

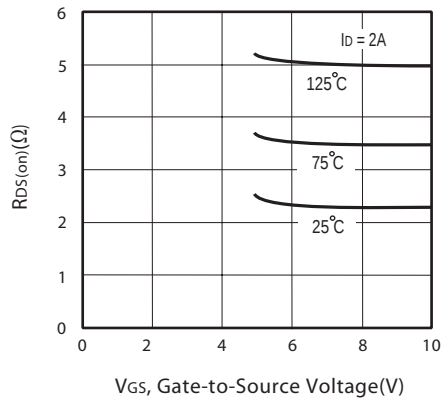


Figure 7. On-Resistance vs. Gate-Source Voltage

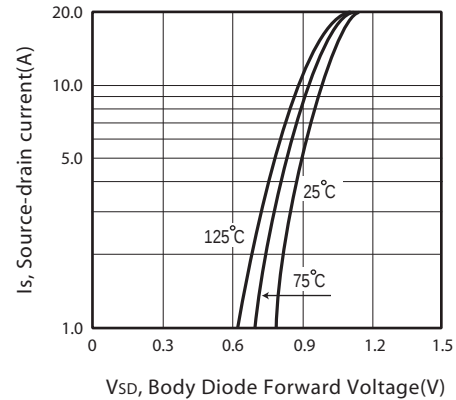


Figure 8. Body Diode Forward Voltage Variation with Source Current

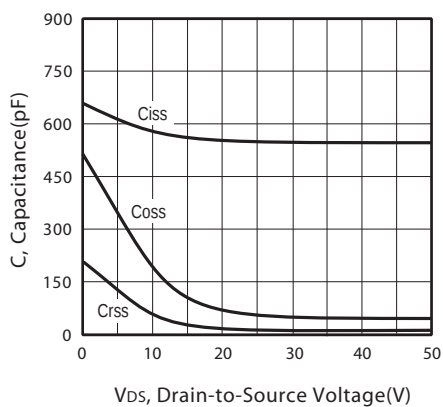


Figure 9. Capacitance

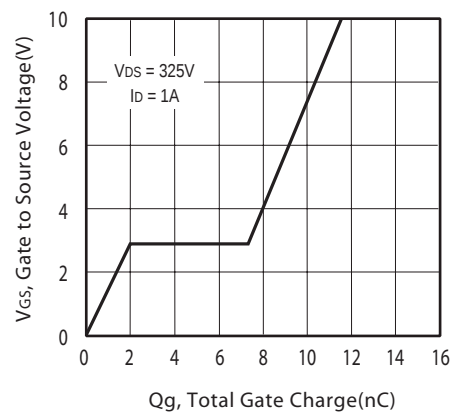


Figure 10. Gate Charge

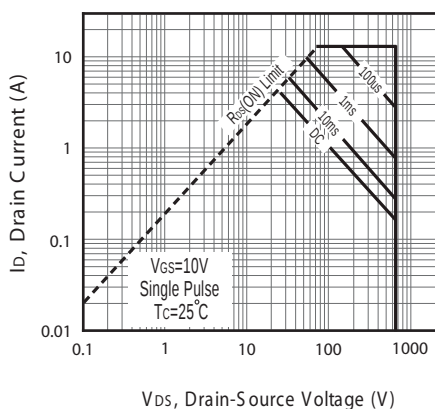


Figure 11a. Maximum Safe Operating Area for SDP04N65

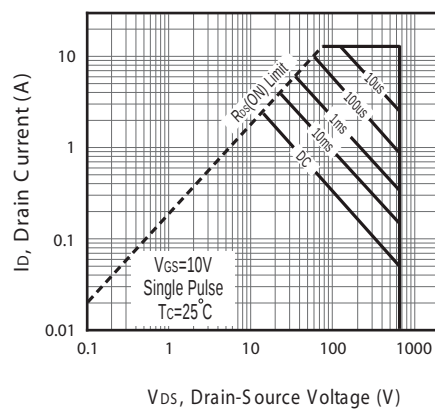



Figure 11b. Maximum Safe Operating Area for SDF04N65

Dec,24,2013

SDP04N65


SDF04N65

Ver 2.2

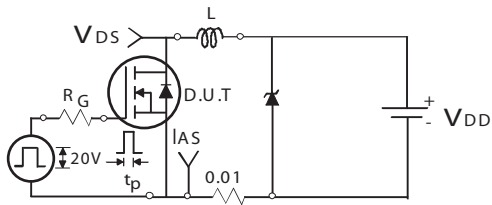

Unclamped Inductive Test Circuit

Figure 12a.

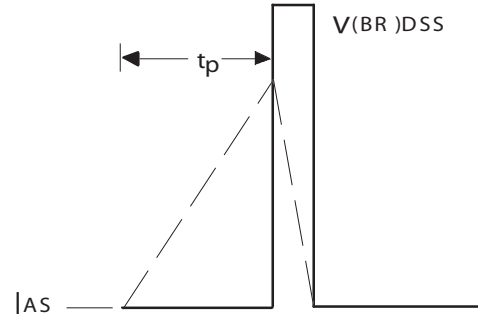

Unclamped Inductive Waveforms

Figure 12b.

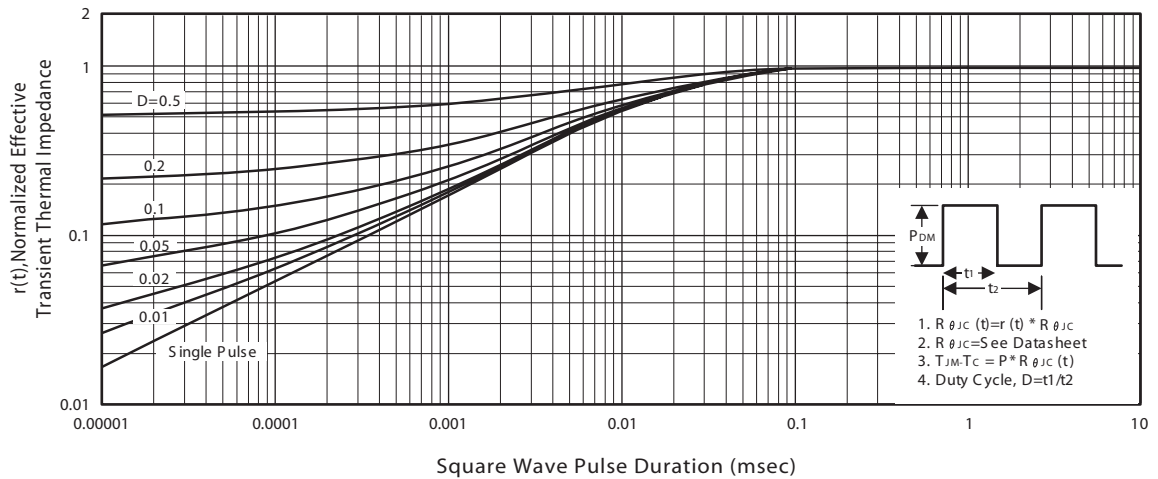


Figure 13a. Normalized Thermal Transient Impedance Curve for SDP04N65

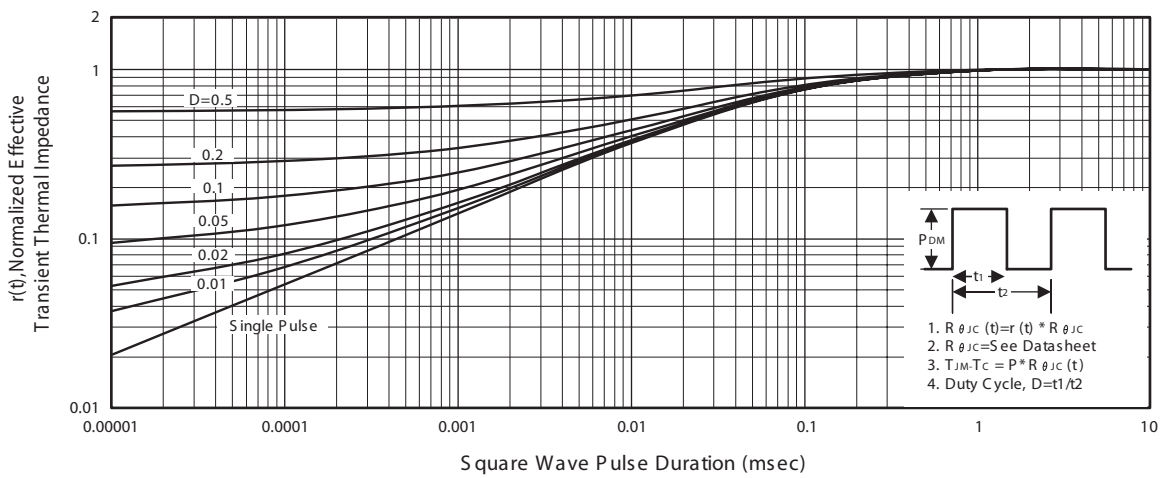


Figure 13b. Normalized Thermal Transient Impedance Curve for SDF04N65

Dec,24,2013


SDP04N65

SDF04N65

Ver 2.2

PACKAGE OUTLINE DIMENSIONS

TO-220

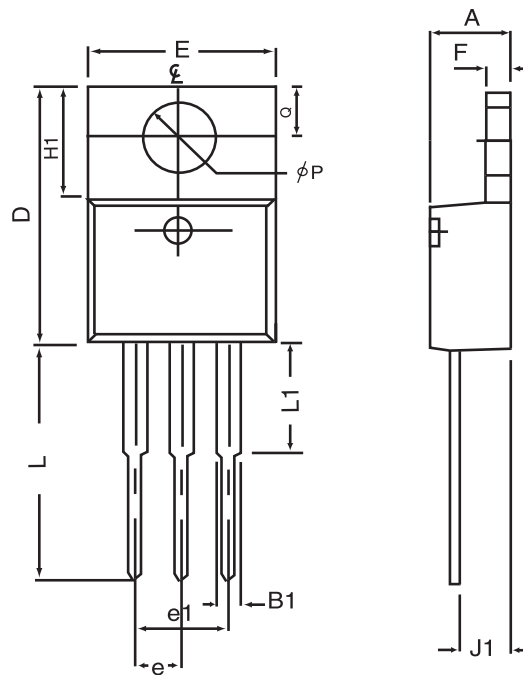

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.32	4.80	0.170	0.189
B1	1.27	1.65	0.050	0.063
D	14.6	16.00	0.575	0.610
E	9.70	10.41	0.382	0.410
e	2.34	2.74	0.092	0.108
e1	4.68	5.48	0.184	0.216
F	1.14	1.40	0.045	0.055
H1	5.97	6.73	0.235	0.265
J1	2.20	2.79	0.087	0.110
L	12.88	14.22	0.507	0.560
L1	3.00	6.35	0.120	0.250
φP	3.50	3.94	0.138	0.155
Q	2.54	3.05	0.100	0.120


Dec,24,2013

SDP04N65

SDF04N65

Ver 2.2

PACKAGE OUTLINE DIMENSIONS

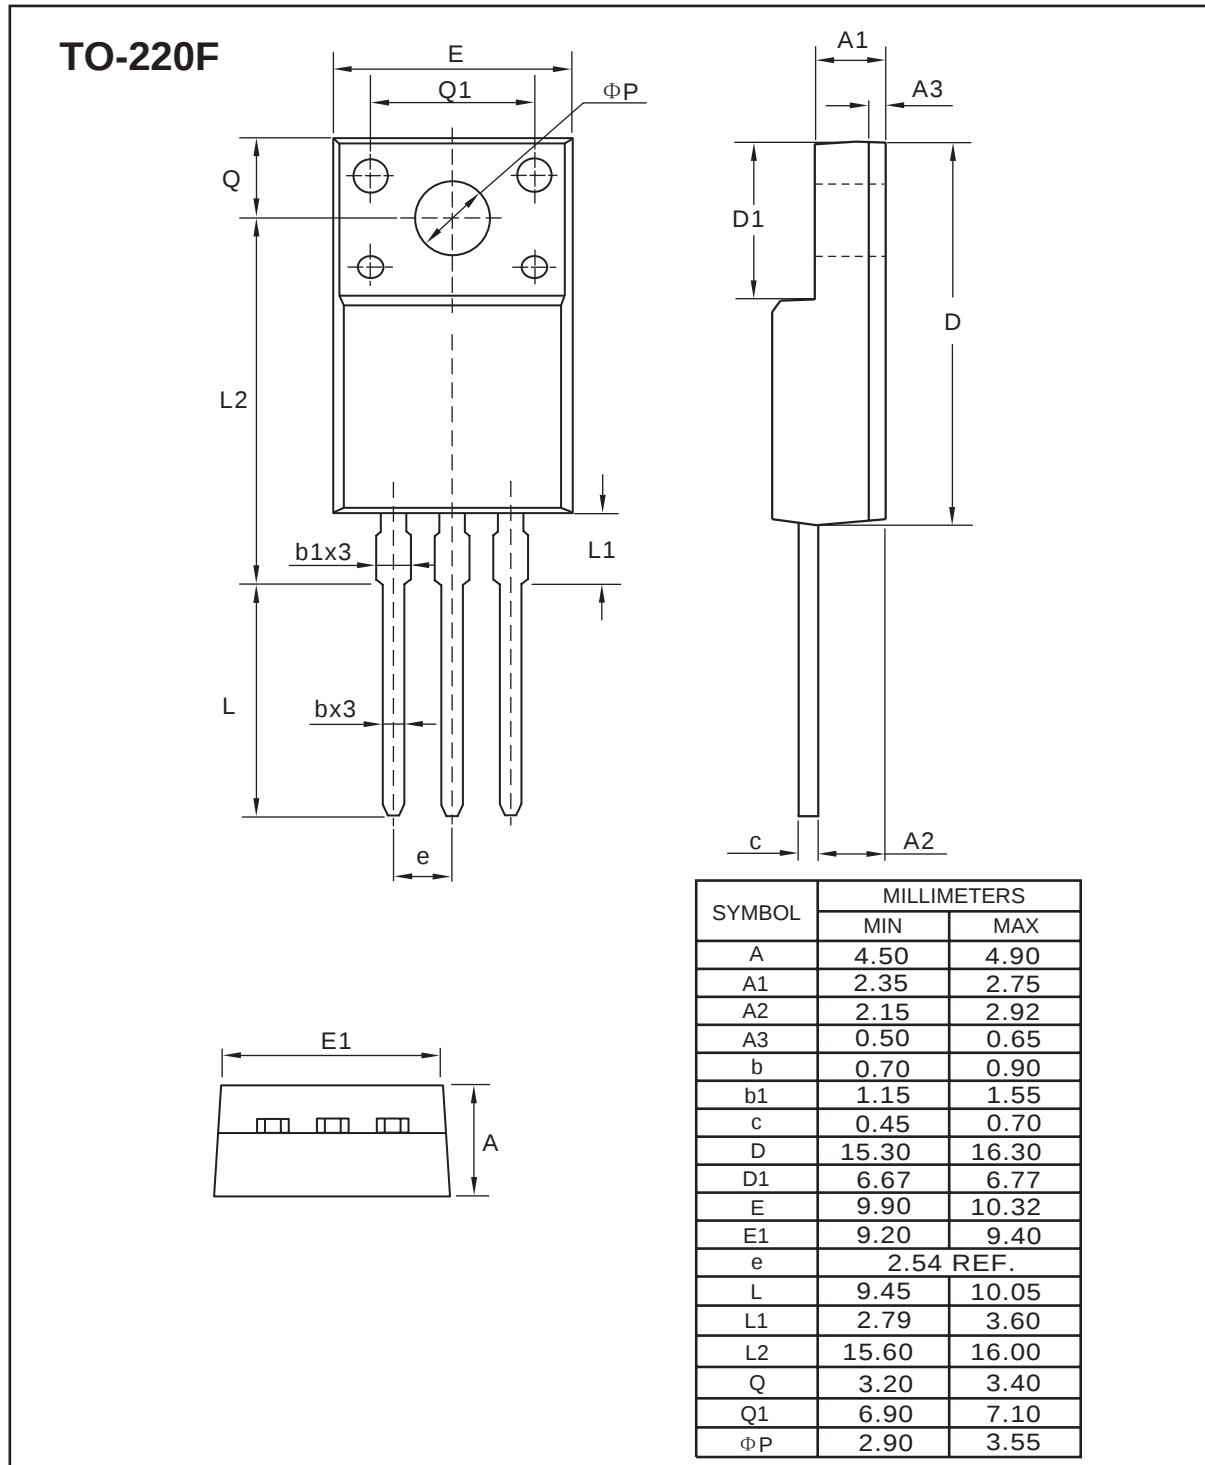


Dec,24,2013

SDP04N65

SDF04N65

Ver 2.2

TO-220 Tube

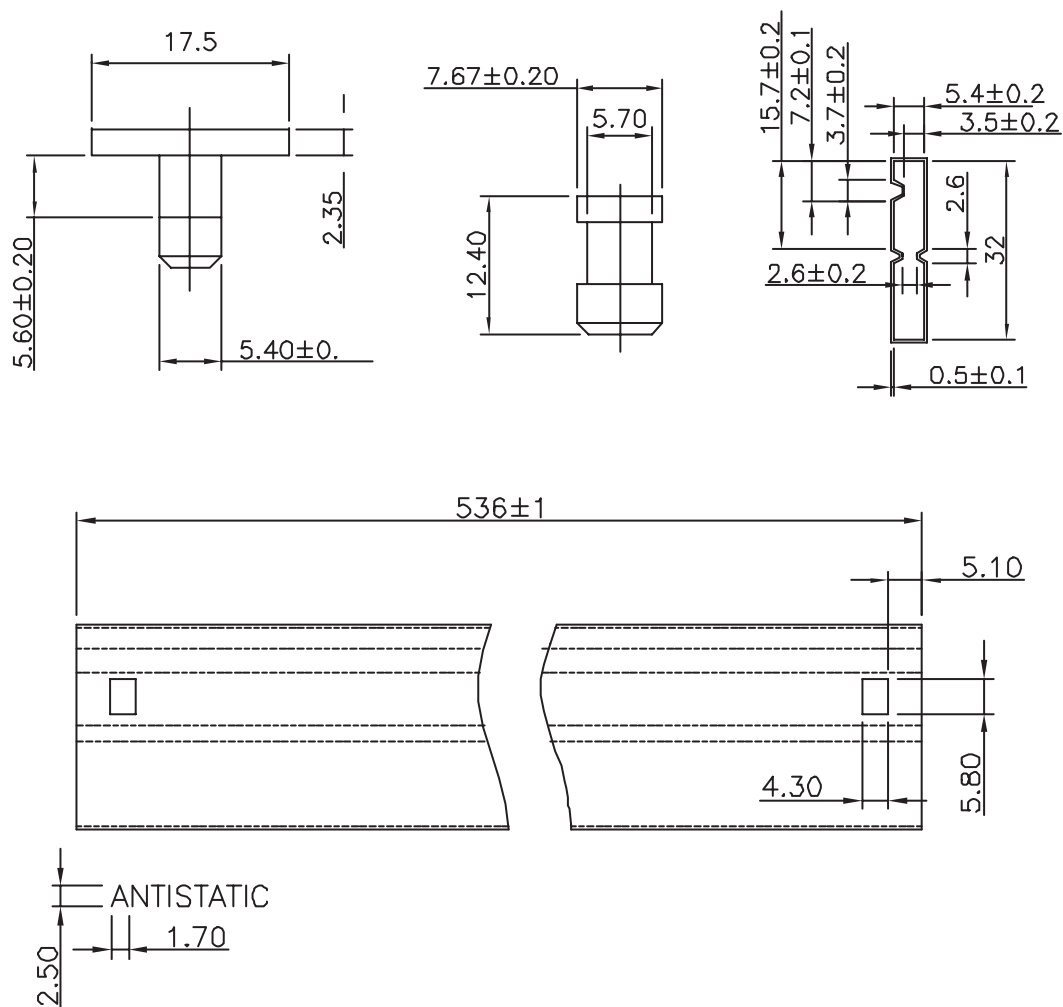


Dec,24,2013


SDP04N65
SDF04N65

Ver 2.2


TO-220F Tube

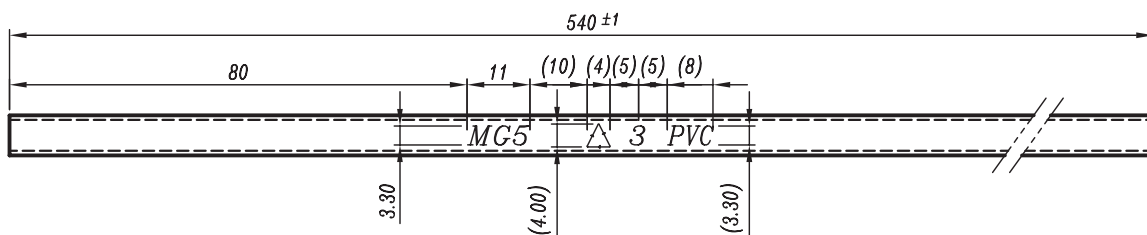

$$t=0.8 \pm 0.15$$

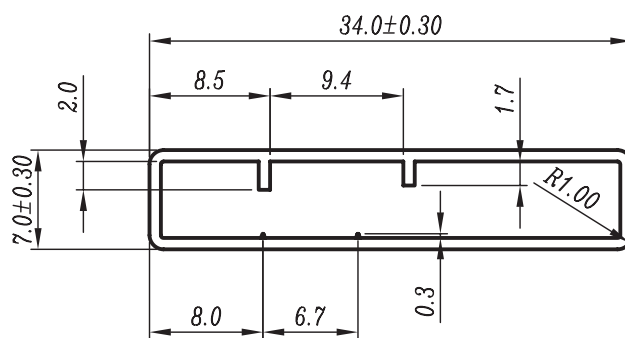

$SCALE=2/1$

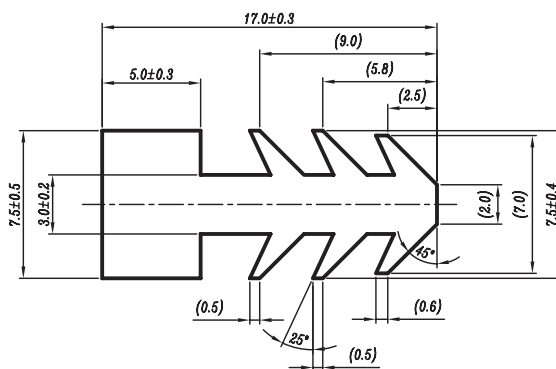

$$L=8.0^{+0.5}_{-1}$$


SDP04N65

SDF04N65


Ver 2.2

TOP MARKING DEFINITION

TO-220 (Halogen Free)

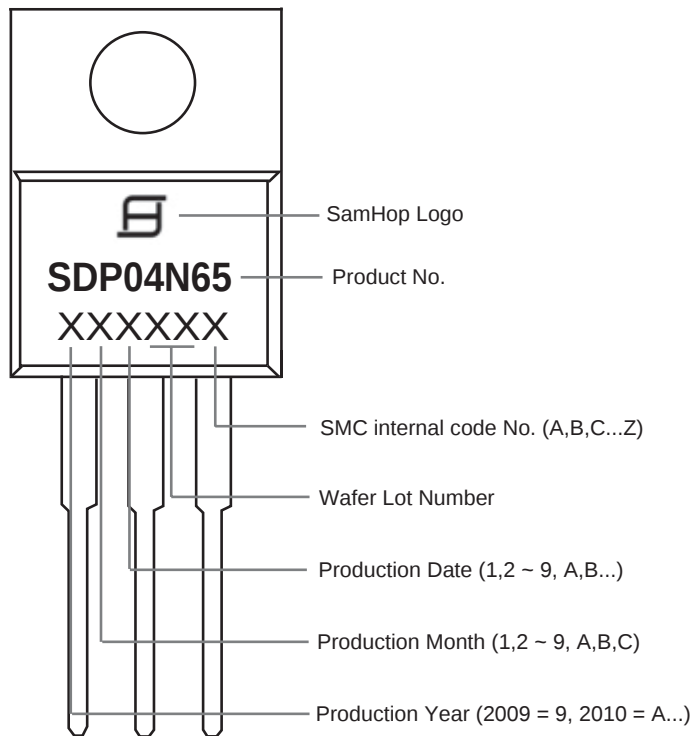

TO-220 (Pb Free)

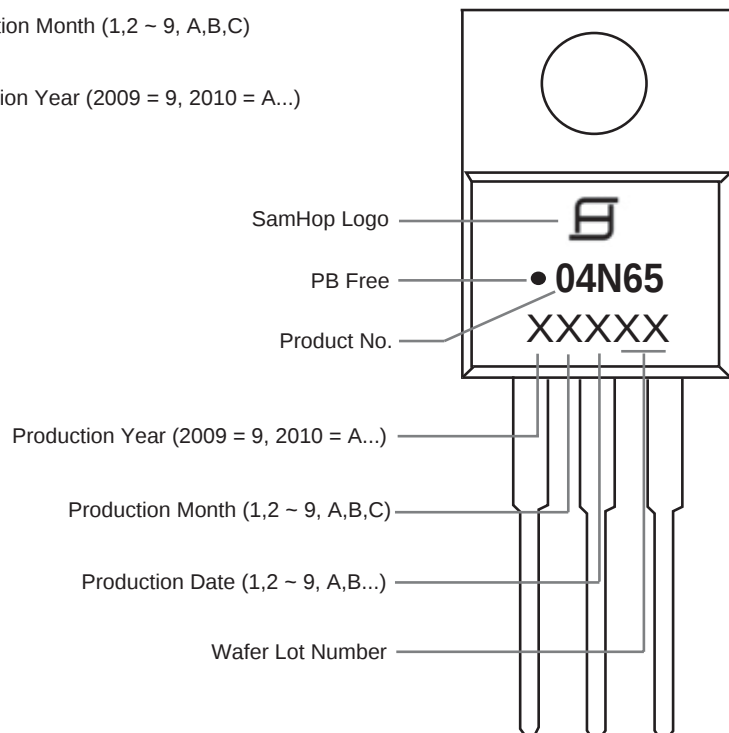

Dec,24,2013


SDP04N65

SDF04N65


Ver 2.2

TOP MARKING DEFINITION

TO-220F (Halogen Free)

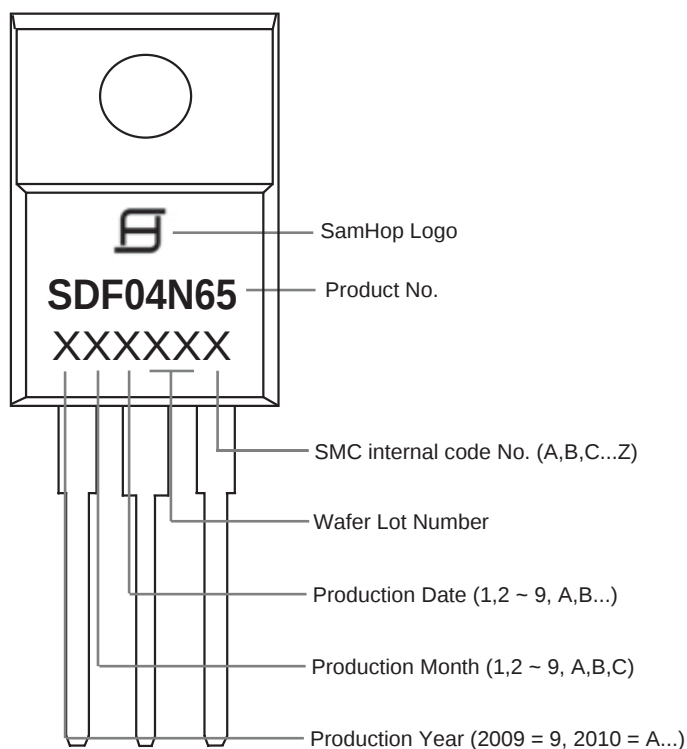

TO-220F (Pb Free)

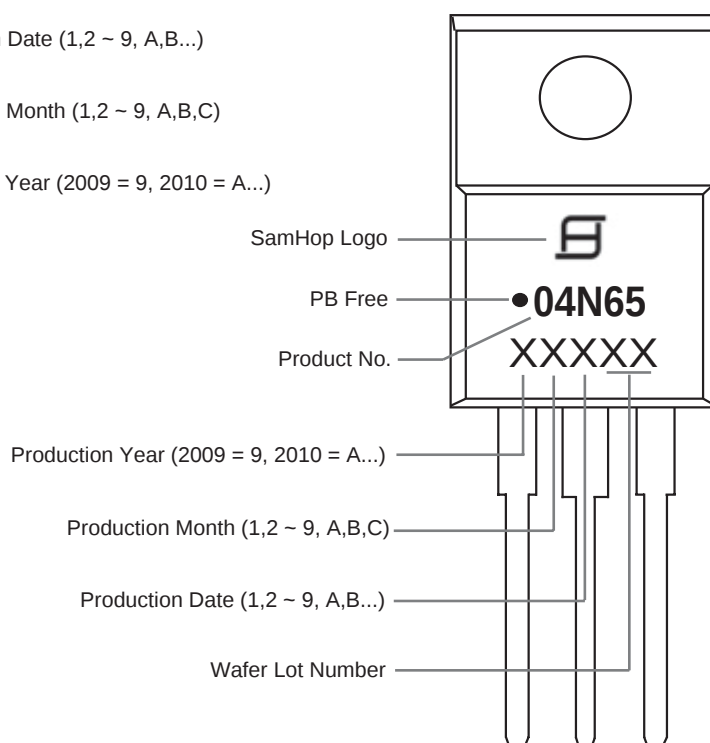

Dec,24,2013