


Features



- Low gate charge
- 100% avalanche tested
- Improved dv/dt capability
- RoHS compliant
- Halogen free package
- JEDEC Qualification

BV_{DSS}	I_D	$R_{DS(on)MAX}$
650V	6.5A	<1.4Ω

D-PAK



I-PAK



Device	Package	Marking	Remark
TMD7N65Z / TMU7N65Z	D-PAK/I-PAK	TMD7N65Z / TMU7N65Z	RoHS
TMD7N65ZG / TMU7N65ZG	D-PAK/I-PAK	TMD7N65ZG / TMU7N65ZG	Halogen Free

Absolute Maximum Ratings

Parameter		Symbol	TMD7N65Z(G)/TMU7N65Z(G)	Unit
Drain-Source Voltage		V_{DSS}	650	V
Gate-Source Voltage		V_{GS}	±30	V
Continuous Drain Current	$T_C = 25\text{ }^{\circ}\text{C}$	I_D	6.5	A
	$T_C = 100\text{ }^{\circ}\text{C}$		3.74	A
Pulsed Drain Current (Note 1)		I_{DM}	26	A
Single Pulse Avalanche Energy (Note 2)		E_{AS}	420	mJ
Repetitive Avalanche Current (Note 1)		I_{AR}	6.5	A
Repetitive Avalanche Energy (Note 1)		E_{AR}	12	mJ
Power Dissipation	$T_C = 25\text{ }^{\circ}\text{C}$	P_D	120	W
	Derate above 25 $^{\circ}\text{C}$		0.96	W/ $^{\circ}\text{C}$
Peak Diode Recovery dv/dt (Note 3)		dv/dt	4.5	V/ns
Operating Junction and Storage Temperature Range		T_J, T_{STG}	-55~150	$^{\circ}\text{C}$
Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds		T_L	300	$^{\circ}\text{C}$

* Limited only by maximum junction temperature

Thermal Characteristics

Parameter	Symbol	TMD7N65Z(G)/TMU7N65Z(G)	Unit
Maximum Thermal resistance, Junction-to-Case	$R_{\theta JC}$	1.04	$^{\circ}\text{C/W}$
Maximum Thermal resistance, Junction-to-Ambient	$R_{\theta JA}$	110	$^{\circ}\text{C/W}$

Electrical Characteristics : $T_C=25^{\circ}\text{C}$, unless otherwise noted

Parameter	Symbol	Test condition	Min	Typ	Max	Units
OFF						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS} = 0\text{ V}$, $I_D = 250\text{ }\mu\text{A}$	650	--	--	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 650\text{ V}$, $V_{GS} = 0\text{ V}$	--	--	1	μA
		$V_{DS} = 520\text{ V}$, $T_C = 125^{\circ}\text{C}$	--	--	10	μA
Forward Gate-Source Leakage Current	I_{GSSF}	$V_{GS} = 30\text{ V}$, $V_{DS} = 0\text{ V}$	--	--	100	μA
Reverse Gate-Source Leakage Current	I_{GSSR}	$V_{GS} = -30\text{ V}$, $V_{DS} = 0\text{ V}$	--	--	-100	μA

ON

Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = 250\text{ }\mu\text{A}$	2	--	4	V
Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS} = 10\text{ V}$, $I_D = 3.25\text{ A}$	--	1.2	1.4	Ω
Forward Transconductance (Note 4)	g_{FS}	$V_{DS} = 30\text{ V}$, $I_D = 3.25\text{ A}$	--	8	--	S

DYNAMIC

Input Capacitance	C_{iss}	$V_{DS} = 25\text{ V}$, $V_{GS} = 0\text{ V}$, $f = 1.0\text{ MHz}$	--	1201	--	pF
Output Capacitance	C_{oss}		--	100	--	pF
Reverse Transfer Capacitance	C_{rss}		--	12	--	pF

SWITCHING







Turn-On Delay Time (Note 4,5)	$t_{d(on)}$	$V_{DD} = 325\text{ V}$, $I_D = 6.5\text{ A}$, $R_G = 25\text{ }\Omega$	--	30	--	ns
Turn-On Rise Time (Note 4,5)	t_r		--	33	--	ns
Turn-Off Delay Time (Note 4,5)	$t_{d(off)}$		--	126	--	ns
Turn-Off Fall Time (Note 4,5)	t_f		--	32	--	ns
Total Gate Charge (Note 4,5)	Q_g	$V_{DS} = 520\text{ V}$, $I_D = 6.5\text{ A}$, $V_{GS} = 10\text{ V}$	--	27	--	nC
Gate-Source Charge (Note 4,5)	Q_{gs}		--	5	--	nC
Gate-Drain Charge (Note 4,5)	Q_{gd}		--	12	--	nC







SOURCE DRAIN DIODE


Maximum Continuous Drain-Source Diode Forward Current	I_S	----	--	--	6.5	A
Maximum Pulsed Drain-Source Diode Forward Current	I_{SM}	----	--	--	26	A
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS} = 0\text{ V}$, $I_S = 6.5\text{ A}$	--	--	1.5	V
Reverse Recovery Time (Note 4)	t_{rr}	$V_{GS} = 0\text{ V}$, $I_S = 6.5\text{ A}$ $dI_F / dt = 100\text{ A}/\mu\text{s}$	--	418	--	ns
Reverse Recovery Charge (Note 4)	Q_{rr}		--	3.3	--	μC

Note :


1. Repeated rating : Pulse width limited by safe operating area
2. $L=18.4\text{ mH}$, $I_{AS} = 6.5\text{ A}$, $V_{DD} = 50\text{ V}$, $R_G = 25\text{ }\Omega$, Starting $T_J = 25^{\circ}\text{C}$
3. $I_{SD} \leq 6.5\text{ A}$, $dI/dt \leq 200\text{ A}/\mu\text{s}$, $V_{DD} \leq BV_{DS}$, Starting $T_J = 25^{\circ}\text{C}$
4. Pulse Test : Pulse width $\leq 300\text{ }\mu\text{s}$, Duty Cycle $\leq 2\%$
5. Essentially Independent of Operating Temperature Typical Characteristics

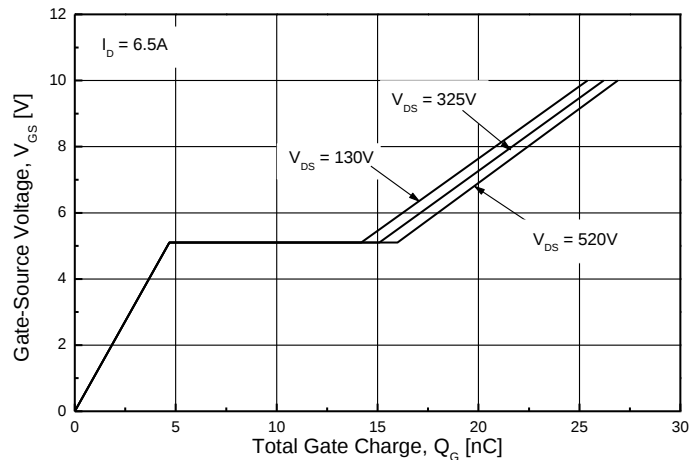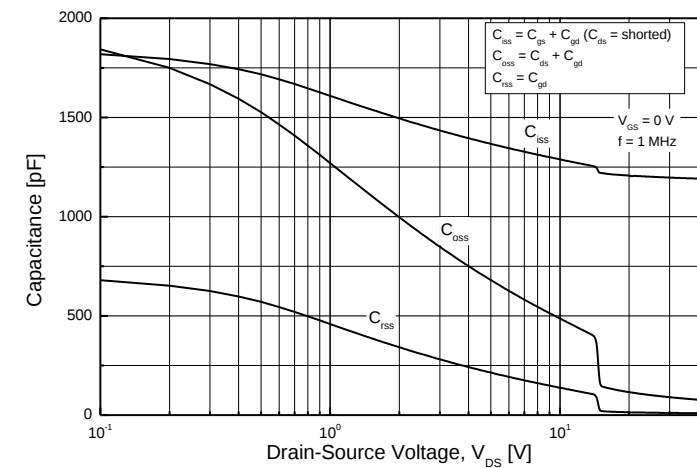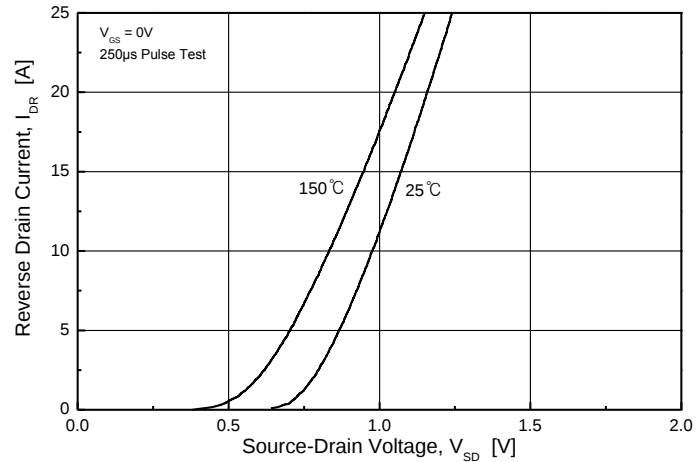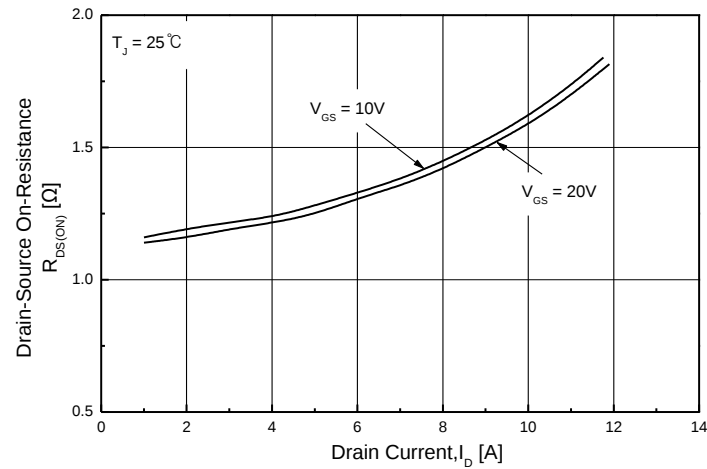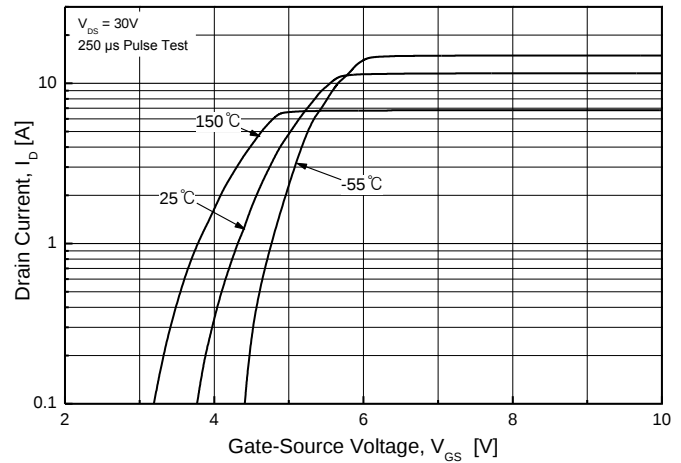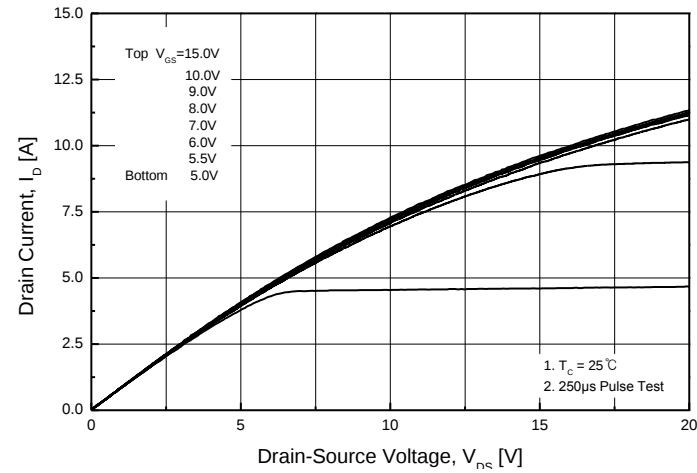

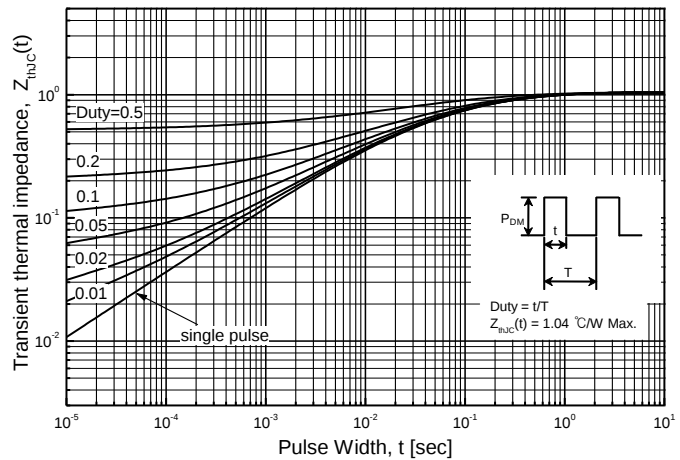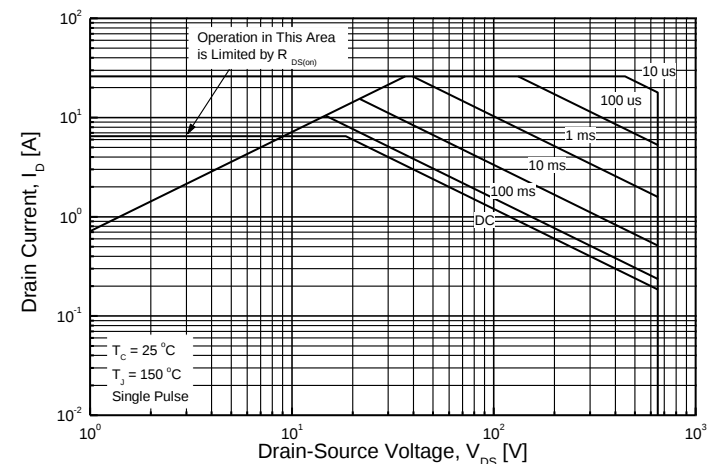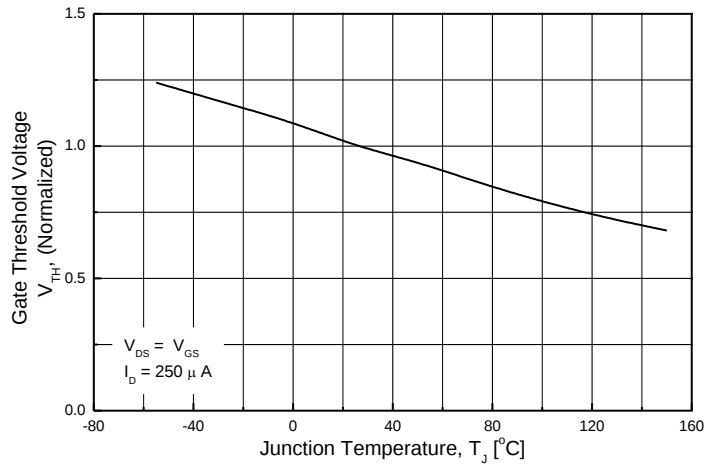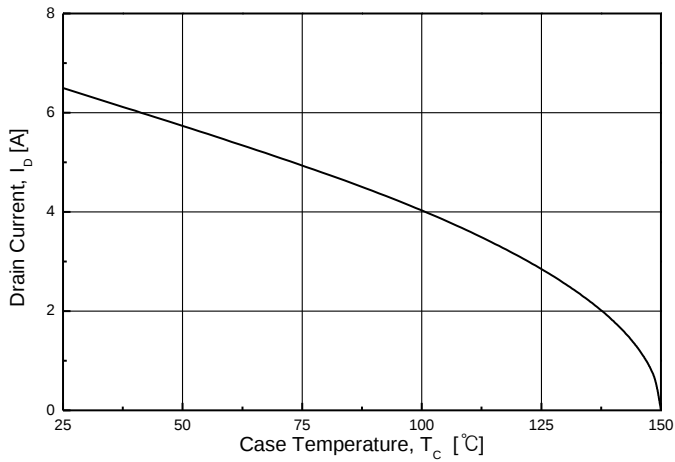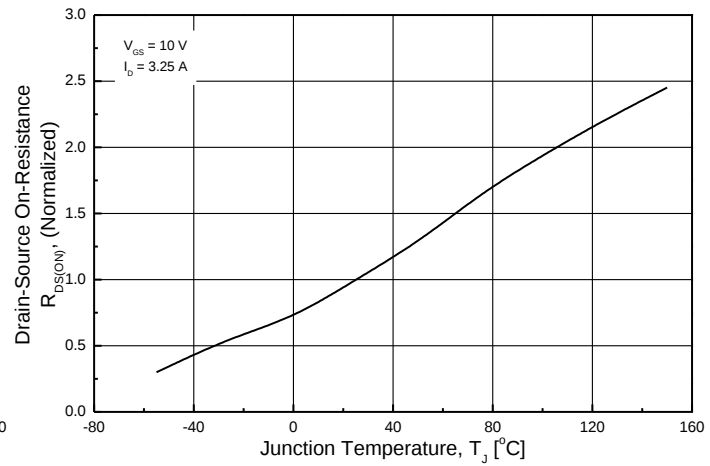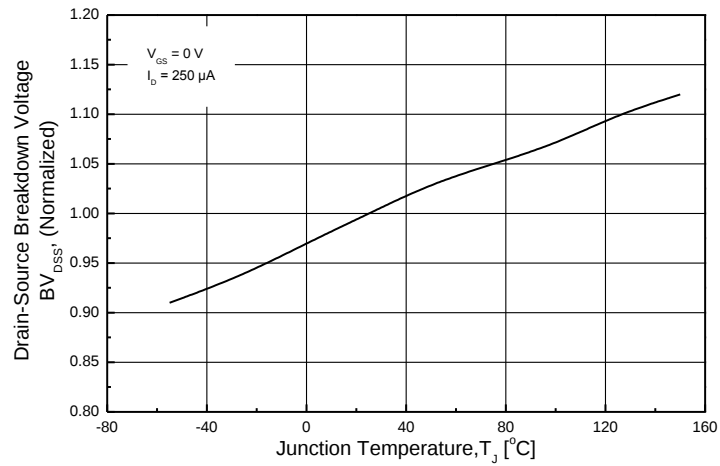

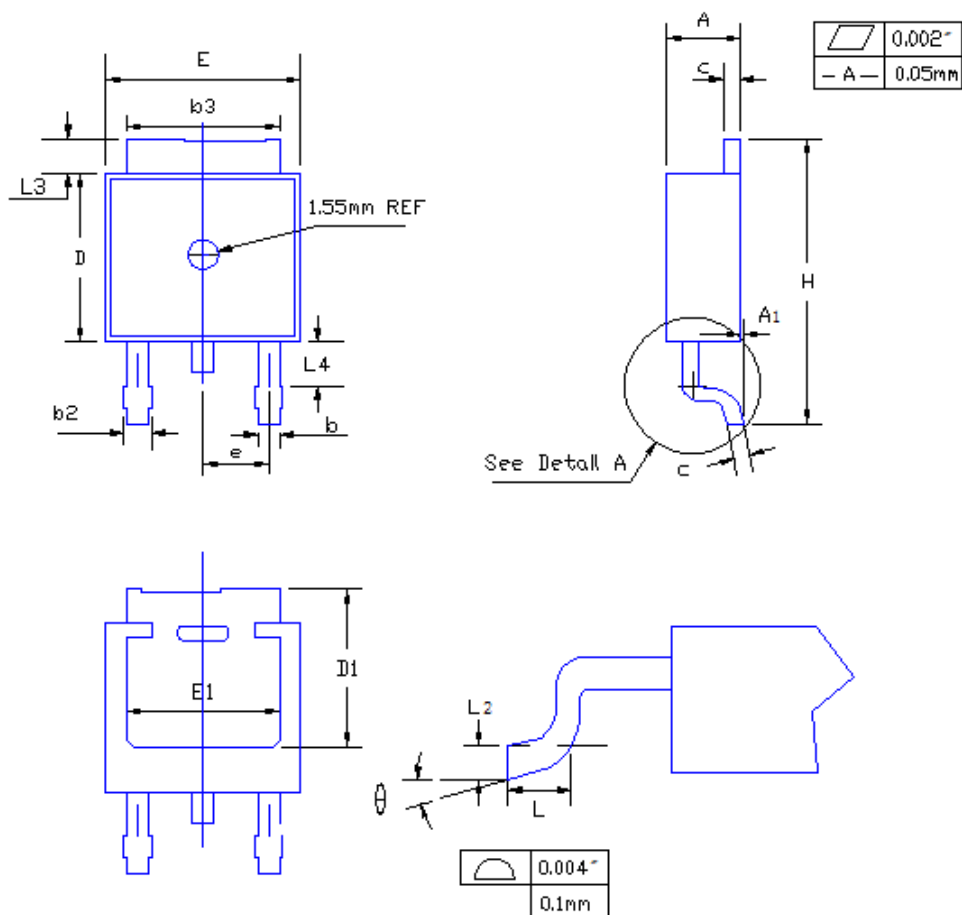TO-252 (D-PAK) MECHANICAL DATA


SYMBOL	MILLIMETERS	
	MIN	MAX
A	2.19	2.38
A1	—	0.13
b	0.64	0.89
b2	0.84	1.14
b3	5.21	5.46
c	0.46	0.61
D	5.97	6.22
D1	5.21	—
E	6.35	6.73
E1	4.83	—
e	2.29BSC	
H	9.65	10.41
L	1.40	1.78
L2	0.51BSC	
L3	0.89	1.27
L4	0.64	1.01
Ø	0	8

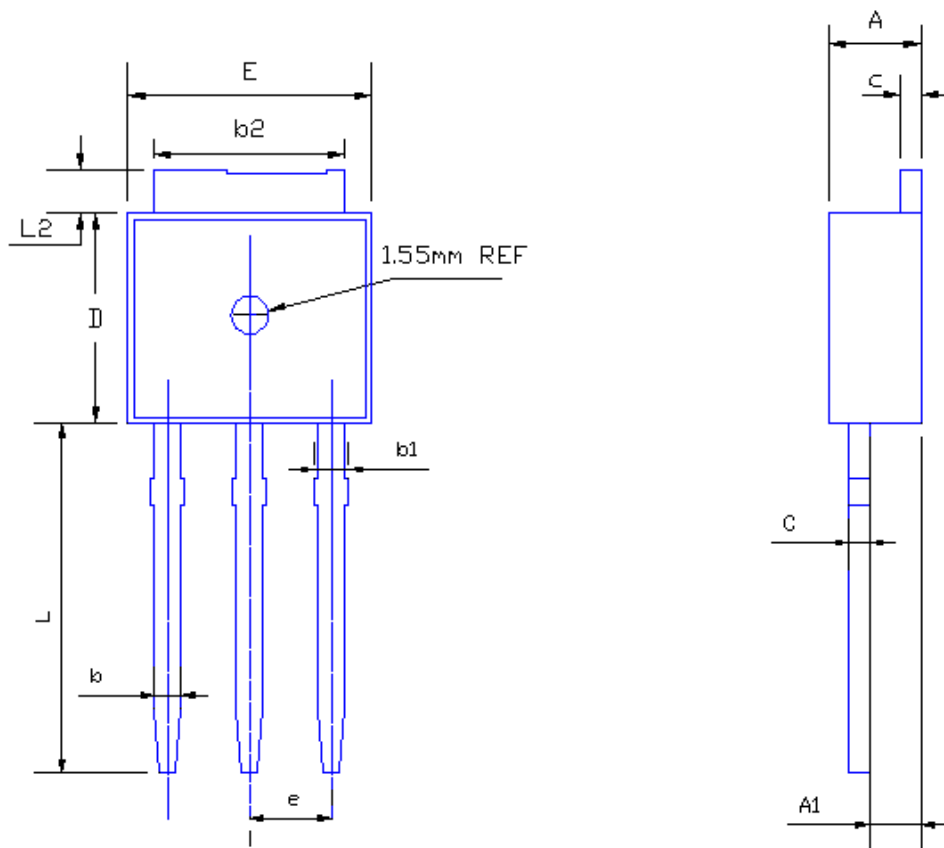TO-251 (I-PAK) MECHANICAL DATA


SYMBOL	MILLIMETERS	
	MIN	MAX
A	2.19	2.38
A1	1.04	1.23
b	0.64	0.89
b1	0.84	1.14
b2	5.23	5.48
c	0.46	0.61
D	5.91	6.28
E	6.21	6.59
e	2.28 TYP	
L	8.89	9.65
L2	0.89	1.27